


FIRST CLASS MAIL  
POSTAGE PAID  
MANCHESTER  
PERMIT NO. 100

# UNDERCOLOR

Vol. 1 No. 3

January 11, 1985

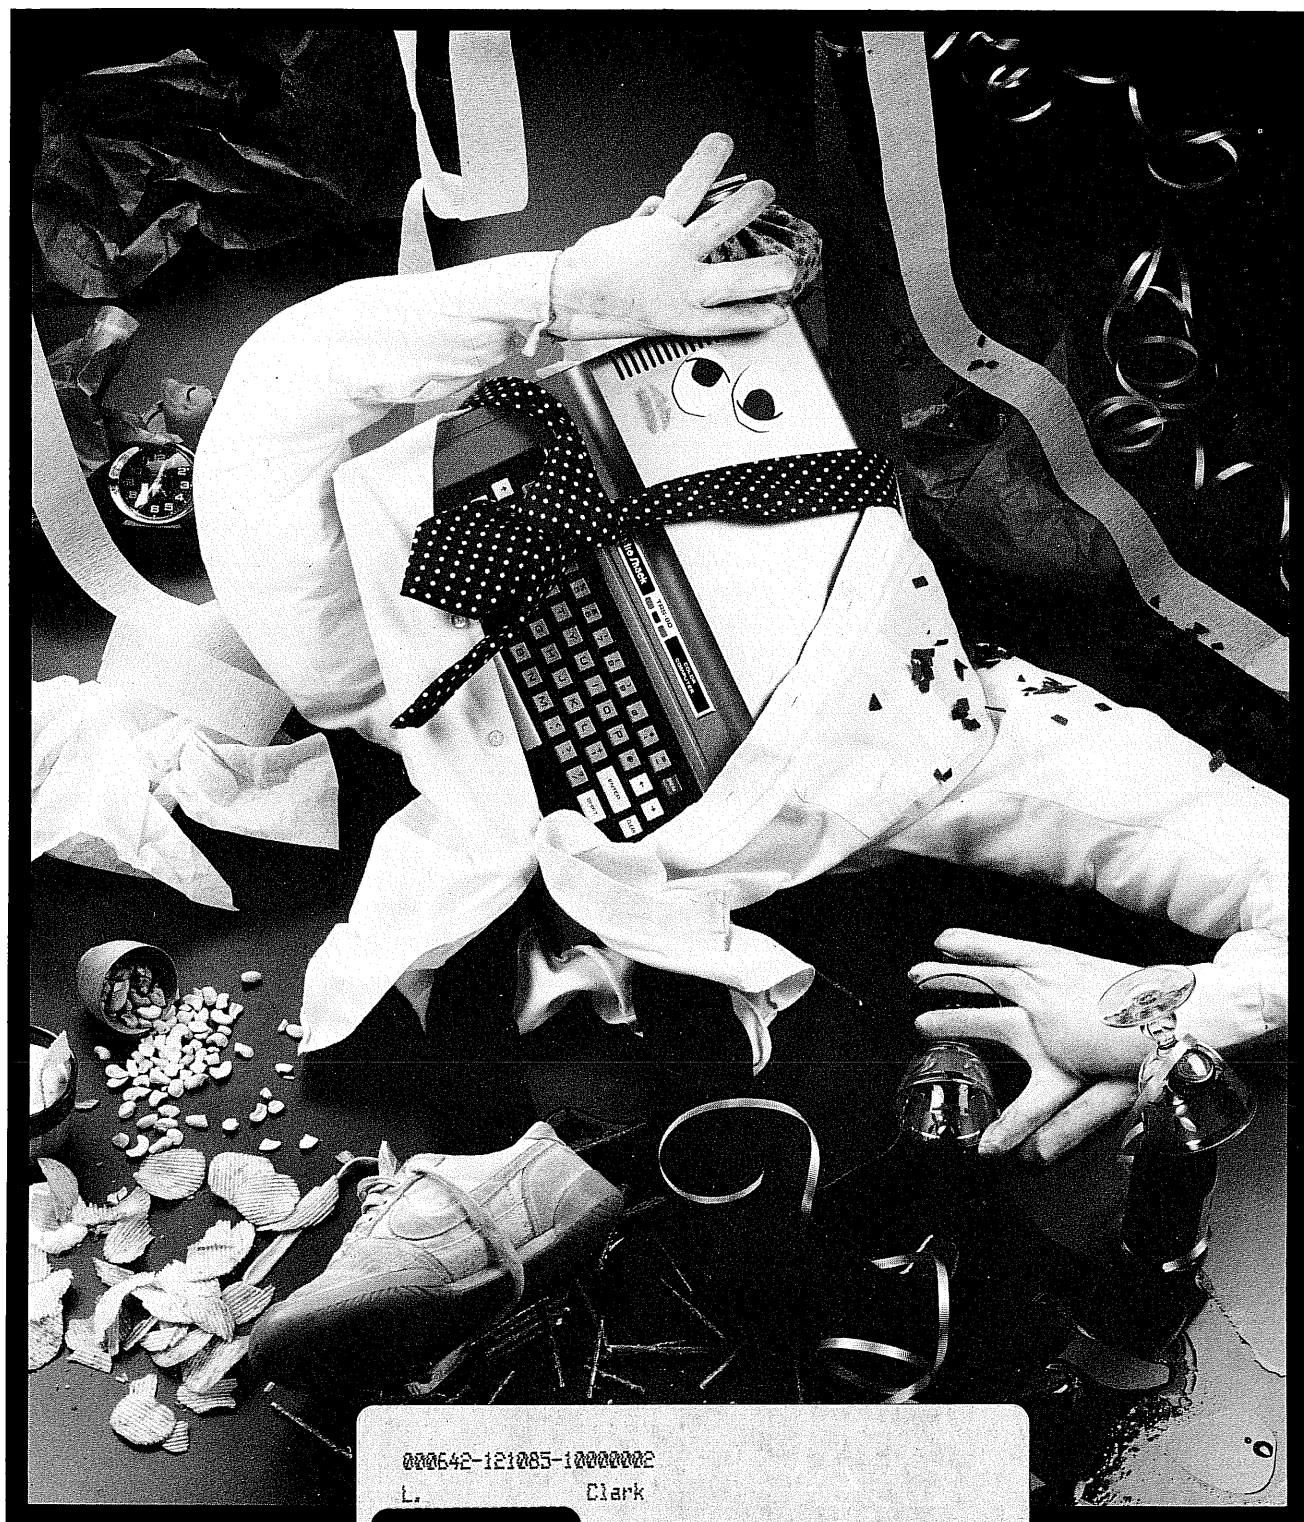

000642-121085-10000002

L. Clark

Paragould

AR

72450

# FEELING HELPLESS? YOU NEED TO LEARN A LESSON!



## MICRO LANGUAGE LAB: LEARNING THE 6809

**F**eeling at the mercy of a programmer somewhere? Mystified by a machine? My **Micro Language Lab** will give you the power to end those helpless feelings.

Here's why. The heart of *any* computer program *anywhere* is machine language. Every piece of software uses it — your favorite game, spreadsheet, word processor, data base manager, or recipe file. Every time you hit "Enter", it's working. All the languages and operating systems are created from it. Basic, Fortran, Pascal, Flex, OS-9,

TRSDOS... they're 6809 machine language, the whole lot!

And you can learn the language of the 6809, the programming heart of your Color Computer, with my **Micro Language Lab**.

Not everyone can program. Writing a few lines in Basic now and then doesn't make you a programmer. But if you *can* program, then my **Micro Language Lab** will teach you — the right stuff, the right way.

I'll teach you in 24 half-hour lessons on 12 audio cassettes, with a 220-page textbook, with data booklets, with 35 sample programs, and with a programming reference card. You'll spend 50 hours or more with my course, listening, watching, and working. And when


you're done, you'll be programming your Color Computer in the 6809's language.

Stop ignoring those gnawing feelings of helplessness. The 6809 is where the power lies in your computer. Turn on that power with the **Micro Language Lab**.

- **Micro Language Lab**, \$99.00 (plus \$3.50 shipping and handling)

Requires 16K Extended Basic EDTASM +

Not sure? Write or call for a Table of Contents and sample pages — and your "I'll Teach You A Lesson" button!

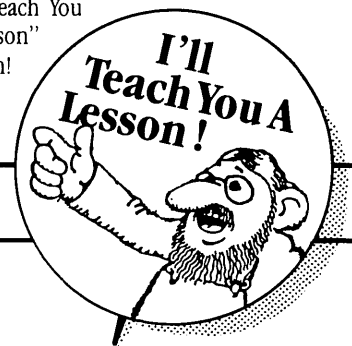

## ALSO AVAILABLE FROM GREEN MOUNTAIN MICRO

(Add \$2.50 shipping and handling to your order)

### Lowerkit III

- Full-time upper and lowercase installs in 15 minutes.
- Normal and reverse video standard
- Fully compatible with all Alpha and Graphic modes

\$79.95 assembled and tested

\$49.95 complete kit of parts

*Important! Specify Color Computer or Color Computer II*

**TV Buff II**, clear image for video monitors, \$19.95 (specify CoCo or CoCo2)

**CoCoPort** parallel interface (now includes plastic case), \$54.95 / \$44.95 kit

**ColorPack** ROM/RAM pack, \$29.95 (specify configuration) / \$19.95 kit / case \$3.00 extra

**64K** memory upgrade kit with full instructions, \$49.95 / with memory test on tape, \$54.95

**Color Quaver** Software Music Synthesizer on tape (requires 32/64K), \$19.95

**Color Burner** EPROM Programmer (2716/32/32A/64/64A/128, 68764/66) with software, \$69.95 / \$56.95 kit

User Group, Educational, Club and Dealer Discounts are available.

TRS-80 and TRSDOS are trademarks of Tandy Corporation. Flex is a trademark of TSC, Inc. OS-9 is a trademark of Microware Corporation.

**Green Mountain Micro**  
Bathory Road, Box U  
Roxbury, Vermont 05669  
802 485-6112

Hours: 9am - 5pm EST, Monday - Friday  
COD/VISA/MASTERCARD

## Who's Who

### Editor

Debra A. Marshall

### Technical

Dennis Bathory Kitz

### Contributing Photographer

Charley Freiberg

### Production Manager

Clare McCarthy

### Paste-Up

Janet Patterson

### Logistics Coordinator

Joanne Trottier

### Technical Consultant and Publisher

Dennis Kitz

### Advertising:

Judy Knapp

(802)485-6139

### Advertising:

Spencer Knowlton

(207)785-4151

### Office

(802)485-6440

### Editorial Office

(207)785-5148

Published By: ColorPlus Inc., Box 6809, Roxbury, VT 05669. (802)485-6440.

**Circulation Problems?** Contact David Gunn, Box 6809, Roxbury, VT 05669, 802-485-6440.

**Subscriptions:** Until Dec. 1, 1984: \$20. After Dec. 1: \$33. Add \$14 for first-class postage. Foreign: until Dec. 1, 1984: Canada/Mexico \$30 U.S.; other countries \$40 U.S. *Under Color* is published 26 times a year. Call 802-485-6440, or write to *Under Color*, Box 6809, Roxbury, VT 05669, Attn: Perley Swann.

**Advertisers:** rates available.


**Editorial Office:** c/o Debra Marshall, RFD 1, Box 786, Union, ME 04862 207-785-5148. Submissions are welcome; include S.A.S.E. for returns. To receive author's guide, write: Author's Guide, Box 6809, Roxbury, VT 05669. Letters to Editor, manuscripts, article queries, etc. should be sent to editorial office.

# Table of Contents

- **Another Fine Mess** ..... page 2  
By Richard Ramella *Classy circle art.*
- **The Data Gatherer—Pt. I** . page 8  
By Dennis Kitz *A welcome interruption.*
- **Cross Talk—Pt. II** ..... page 12  
By William Barden, Jr. *The last word on RS-232*
- **Find** ..... page 15  
By Stephen Allen *A new word in Basic.*
- **News and Gossip** .....page 21  
By Dennis Kitz *Hot off the modem.*
- **Reviews** ..... page 22
- **Defuser** ..... page 24  
By Terry Kepner *Answers to life's little problems.*

Cover Photo by Charles Freiberg



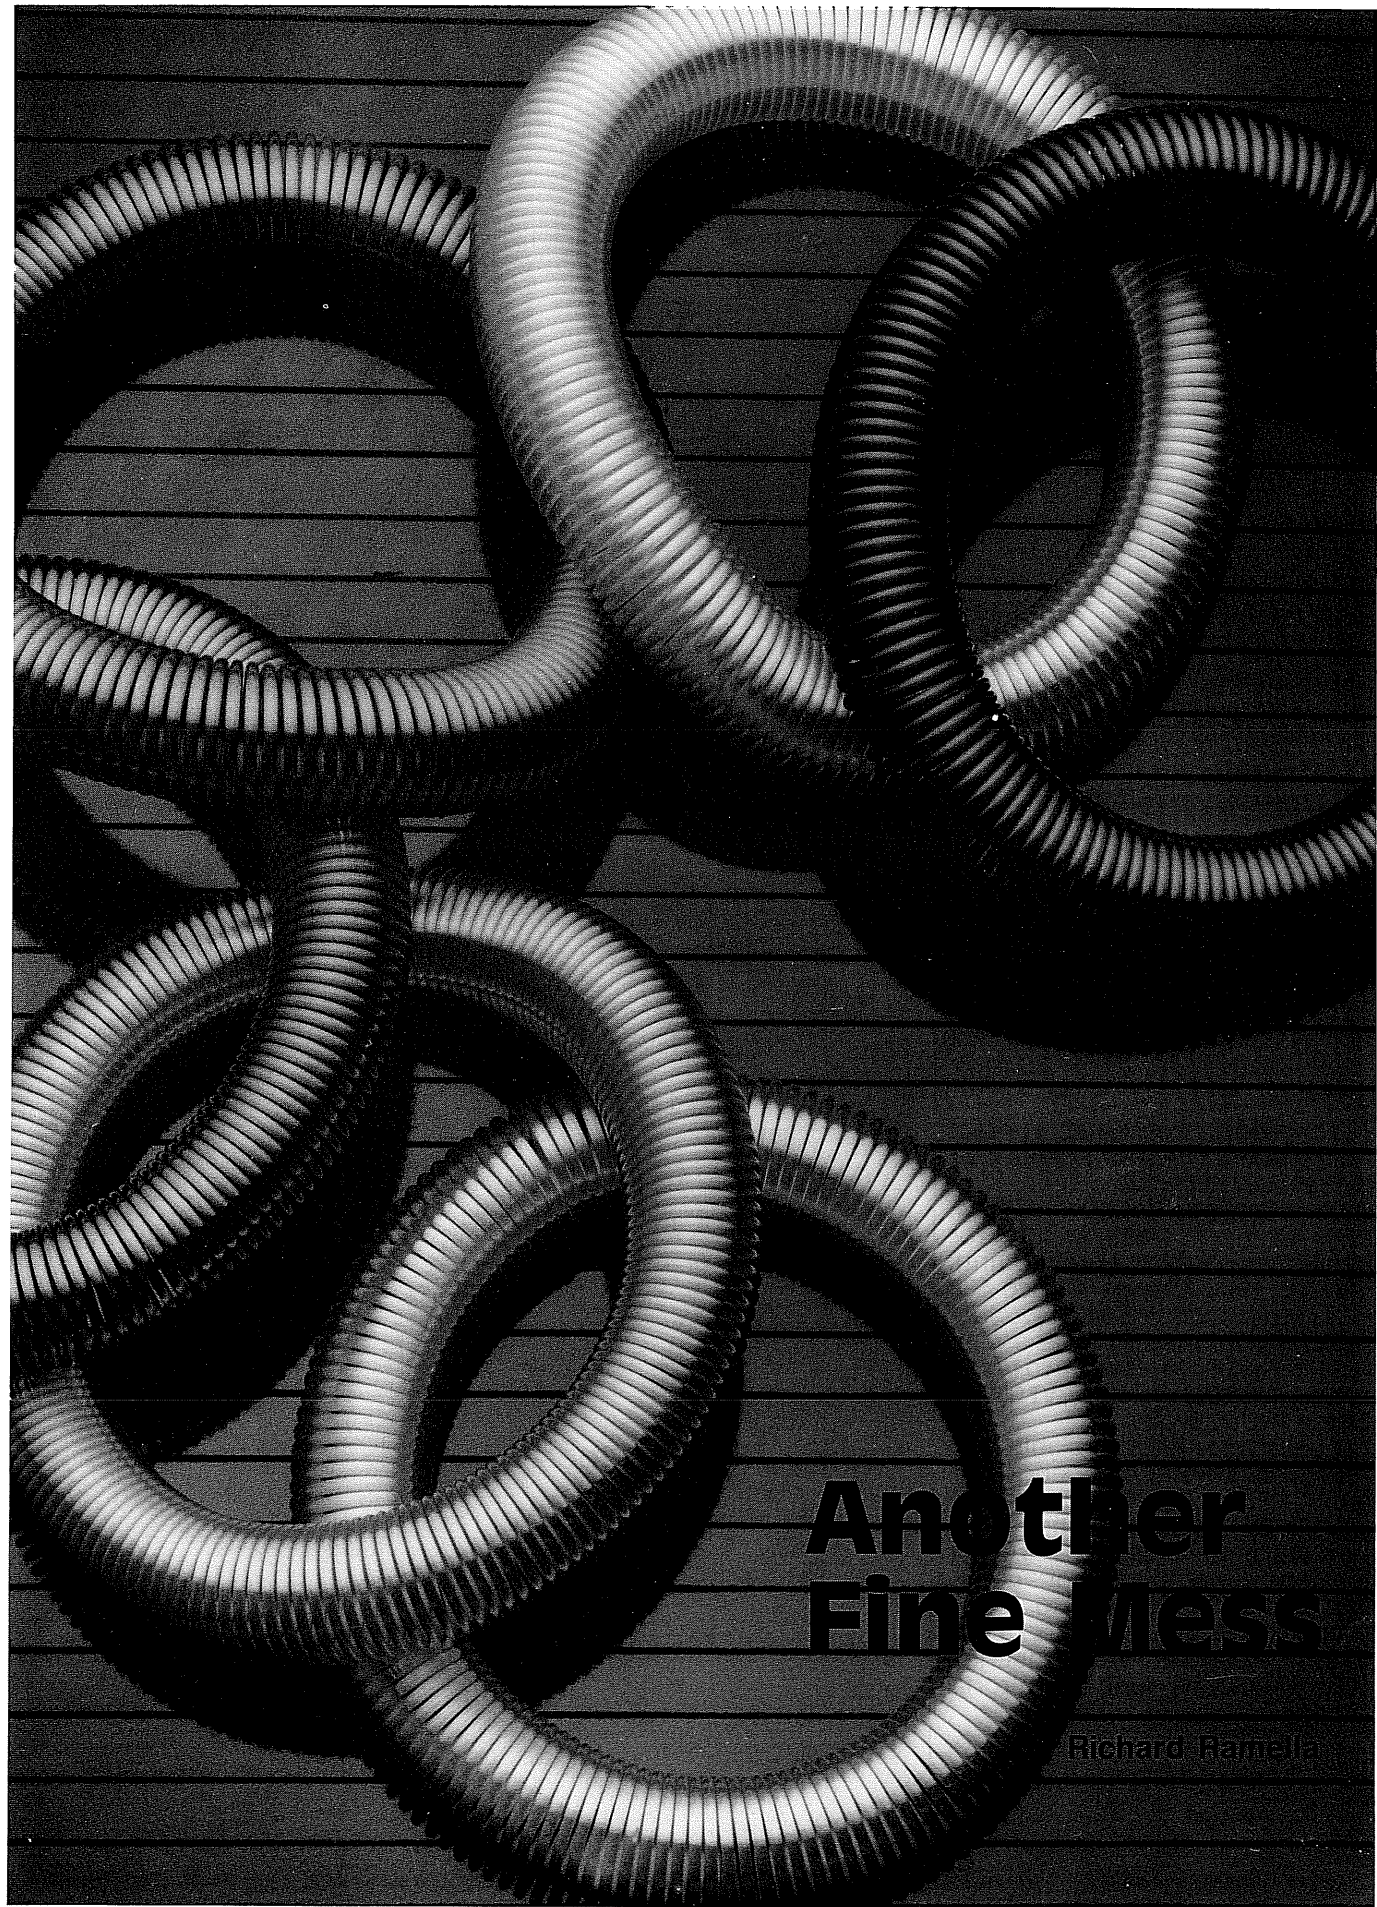

# Another Fine Mess

Richard Ramella



*Ed's Note: Here's some fun just in time for the end of the holidays, as only Richard Ramella can product it!*

With the help of Leonardo da Vinci, Stanley Laurel, Oliver Hardy and Winky the Clown, I'm going to show you how to use the Circle command to create simple and impressive computer art.

Normally computer art tends to produce lines and squares, and complex efforts require more data entry than the results often merit. However, with the Circle command's diversity you can break into the heady atmosphere of the curved line. You can control the curve and bend it to your artistic will.

I must acknowledge da Vinci, perhaps the greatest artist in history, because of an anecdote I read about him. It is said he could draw a perfect circle with an unsupported brush. Out he would reach, around would go his sure hand and—swish—a perfect circle.

I began to look for the circle in Leonardo's art. It is everywhere. You probably won't have much trouble finding a print of the *Mona Lisa*. Look carefully at that famous face. The forehead, the cheeks, the chin, the nose, even the enigmatic smile—they are all parts of circles. Somehow, the

harmony and the mystery of the face emerge from the gently rounded parts.

Perhaps it was a leap from the sublime to the mundane, but I began to see that the Circle command could be used to make art. I'm no artist, but I tried it and it worked. You won't see anything comparable to *The Last Supper* in my work. Try Listing 1, *Another Fine Mess*, and you will see passable caricatures of my favorite comics, Mister Laurel and Mister Hardy. Try Listing 2, *Winky*, and you will see a colorful clown with a bit of animation.

What is noteworthy about these efforts is that the Circle command is so diverse it can be used to create greatly different curved lines.

Listing 3, *Circle Tester*, is a demonstration program. It lets you play with three concepts taught in the *Going in Circles* chapter (pages 40–47) of the manual *Going Ahead With Extended Color Basic*. The three ideas of the demonstration are radius of the circle, height/width ratio, and start-end points of the circumference.

I urge you to key in and try the short program *Circle Tester* before you try *Winky* or *Another Fine Mess*. This way, you'll understand the concepts of the main programs when you

### Listing 1. Another Fine Mess

```

100 REM * ANOTHER FINE MESS * RICHARD RAMELLA
110 REM * TRS-80 EXTENDED COLOR BASIC 16K
120 CLS
130 CLEAR 400
140 PRINT @ 231,"ANOTHER FINE MESS"
150 FOR T=1 TO 1000
160 NEXT T
170 PMODE 4,1
180 PCLS 1
190 SCREEN 1,0
200 FOR T=1 TO 500
210 NEXT T
220 CIRCLE(50,96),35,.2,3
230 X=50
240 FOR Y=25 TO 30
250 CIRCLE(X,Y),40,.2,.1,.01,.5
260 NEXT Y
270 PAINT(40,2),2,2
280 FOR Y=135 TO 136
290 CIRCLE(50,Y),20,4,5,0,.5
300 NEXT Y
310 FOR Y=109 TO 111
320 CIRCLE(50,Y),20,2,.2,0,.5
330 NEXT Y
340 Y=70
350 FOR X=35 TO 65 STEP 30
360 CIRCLE(X,Y),10,2,3,.5,0
370 CIRCLE(X+3,Y-3),5,2
380 PAINT(X+3,Y-3),2,2
390 NEXT X
400 LINE(55,75)-(68,100),PRESET
410 LINE(45,75)-(54,100),PRESET
420 CIRCLE(61,100),8,2,.2,0,.5
430 FOR X=15 TO 85 STEP 70
440 CIRCLE(X,70),4,2,5
450 CIRCLE(170,96),70,2
460 FOR Y=155 TO 156
470 CIRCLE(170,Y),20,2,.25,.5
480 NEXT Y
490 CIRCLE(170,110),15,2
500 FOR A=12 TO 1 STEP -1
510 CIRCLE(170,147),A,.2,2,.5
520 NEXT A
530 FOR X=145 TO 185 STEP 40
540 CIRCLE(X,90),5,2,.8,.25,.75
550 CIRCLE(X+5,90),3,2
560 NEXT X
570 DRAW "C0;BM100,50;R140"
580 CIRCLE(170,50),55,2,.8,.5,.01
590 DRAW "C1;BM170,22;D5"
600 PAINT(170,30),2,2
610 FOR X=140 TO 200 STEP 5
620 CIRCLE(X,57),5,2,2,.25,.75
630 NEXT X
640 POKE 223,100
650 A$="L8;G;P64;E;P64;G;P64;E;P16"
660 B$="L10;FGFDG;L8;E;P4"
670 C$="L12;FGFDG;L8;C;P4"
680 D$="L8;E;L4;C;P8"
690 E$=D$+D$+D$
700 F$=A$+A$+B$++A$+A$+C$+E$
710 PLAY F$
720 GOTO 710

```

see them at work.

*Circle Tester* has a three-item menu. Each one either draws a circle or a portion of a circle. In all cases the center of the circle is the center of the screen: 128 on the across axis and 96 on the down axis.

Let's try each menu item:

**Radius**—Run the program and tap R. The radius of a circle is the distance from its center to its edge. On the Color Computer the numbers referring to the radius are expressed in terms of the PSET points on the screen at the highest resolution. That means the screen has 255 points on the X axis, and 192 on the Y axis.

For some strange reason we are allowed a circle radius from 0 to 65535. In trying this test, you will see the following prompt:

```
FOR RADIUS OF CIRCLE
- 0 to 65535
```

Answer the prompt with a number within these two figures and tap Enter. When you have seen the result and want to try again, tap any key to return to the prompt.

Line 640 shows the form of the command, and the X position is where the radius number or variable goes in the circle command.

In choosing radii, the number 0 will produce a mere dot on the screen. Try larger numbers—5, 10, 30 and 40—to see larger circles. As you choose increasingly larger numbers for the radius, the circle, like a balloon inflated in a box, will flatten against the edges of the screen. Keep trying higher numbers and you will in time see the result as a square at screen's edge.

Now run the program again. Type H and tap Enter to try some height/width experiments. Depending on the number you enter here, you can make either height or width greater than the other. You will see this prompt:

```
- 1 TO 255 FOR HEIGHT
- 0 TO .99 FOR WIDTH
```


Answer the prompt by typing the number and tapping Enter. To return from the display to the prompt for another try, tap any key. Line 300 is where the Circle command does its trick, and the variable X at the end of the command represents

## Listing 2. Winky

```
100 REM * WINKY THE CLOWN * RICHARD RAMELLA
110 REM * TRS-80 EXTENDED COLOR BASIC
120 PMODE 3,1
130 PCLS 1
140 SCREEN 1,1
150 CIRCLE(128,100),25
160 CIRCLE(96,70),15
170 CIRCLE(158,70),15
180 LINE(0,191)-(78,160),PSET
190 LINE(178,160)-(252,191),PSET
200 CIRCLE(96,70),10,3,.70
210 PAINT(97,71),3
220 CIRCLE(158,70),10,3,.7
230 PAINT(157,71),3
240 CIRCLE(96,70),3,,2
250 CIRCLE(158,70),3,,2
260 PAINT(130,96),8,8
270 CIRCLE(128,96),60,4,2
280 CIRCLE(60,96),10,,3
290 CIRCLE(196,96),10,,3
300 CIRCLE(100,60),20,,2,.5,1
310 CIRCLE(154,60),20,,2,.5,1
320 DRAW "BM30,30;R50"
330 DRAW "BML78,30;R50"
340 LINE(30,30)-(70,70),PSET
350 LINE(228,30)-(188,70),PSET
360 PAINT(40,35),3,8
370 PAINT(180,35),3,8
380 PAINT(10,191),8,8
390 PAINT(250,191),8,8
400 CIRCLE(128,96),200,4
410 Y=2
420 FOR X=96 TO 160 STEP 4
430 LINE(X,0)-(X,Y),PSET
440 IF X<127 THEN Y=Y+4 ELSE Y=Y-4
450 NEXT X
460 DRAW "BM128,127;D11"
470 DRAW "BM110,145;R35"
480 PAINT(3,3),2,4
490 PAINT(250,3),2,4
500 PMODE 4,1
510 FOR T=1 TO 800
520 NEXT T
530 DRAW "C0;BM100,145;R55"
540 FOR X=125 TO 155
550 IF X=126 THEN FOR T=1 TO 1000: NEXT
560 CIRCLE(128,X),40,1,.5,0,.5
570 NEXT X
580 FOR X=145 TO 151
590 CIRCLE(128,X),32,2,.4,0,.5
600 NEXT X
610 FOR T=1 TO 1000
620 NEXT T
630 PMODE 3,1
640 SCREEN 2,1
650 FOR T=1 TO 500
660 NEXT T
670 FOR Q=1 TO 2
680 FOR X=10 TO 3 STEP -1
690 CIRCLE(96,70),X,5,.7
700 CIRCLE(96,70),3,,2
710 NEXT X
720 FOR X=1 TO 10
730 CIRCLE(96,70),X,3,.7
740 CIRCLE(96,70),3,,2
750 NEXT X,Q
760 GOTO 670
```

# FULL GRAPHIC CAPABILITIES !! VIZIDRAW 1.0

BY GEORGE ZINZENICZ AUTHOR OF COLOR TOOLKIT

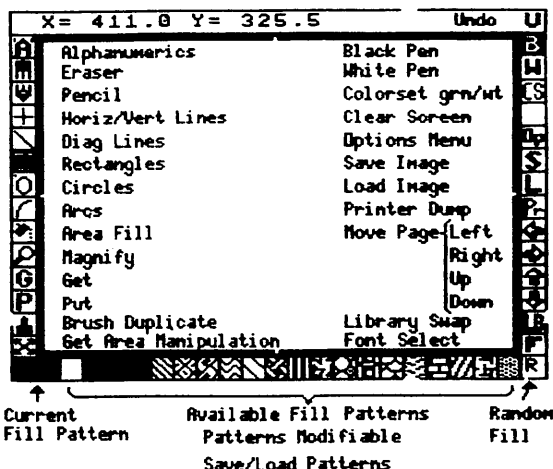


**Interactive Drawing Board**  
**Graphic Display Processor**  
**Text Manipulation**  
**Versatile Text Sizes/Fonts**  
**Italics Underline Bold**

Small, Normal Size or **ENLARGED !**

**448 X 480 PIXEL WORKSHEET !**  
You can design a **whole sheet**  
of paper in the COCO's memory!  
**NO MORE SMALL PICTURES!!**

THE POWER OF 'MACPAINT' AT A COCO PRICE !

13 STANDARD FONT SETS INCLUDED !!  
(3x5, 4x7, 5x7, 7x9, Daisy, Venice,  
English, Frontier, Hollow, Future,  
Digital 1 and Digital 2)

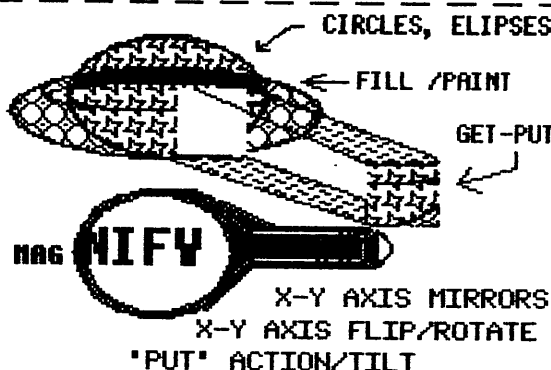

PRINTERS: RS (LP VII FORMAT, EPSON,  
C-TOTH 8510, GEMINI 10 & 10X)

TAPE or  
DISK **\$49.95**  
please specify + \$2.00 POSTAGE  
(DEALER INQUIRIES WELCOME)



## VIDX VIDEO DIGITIZER

**NO DISK DRIVES NEEDED !!**  
**NO Y-CABLES or MULTIPACKS!**

Yes, that's right you don't need any of the above to run VIDX. VIDX can be run with a simple 16K E.C.B. TAPE MACHINE up to a 64K DISK SYSTEM!!

Just connect VIDX between the video source and the RS-232 port of your Color Computer. You can digitize any source of video such as off air TV, video tape recorder or live camera! Software is supplied on a RS-DDS DISK or cassette (not protected!).

Please specify system you plan to use  
THE SOFTWARE FEATURES:

- 1 SINGLE/ MULTIPLE EXPOSURES
- 1 ABORT OR RESUME SCAN
- 1 LOGICAL 'AND' SCREEN 2 AND 1
- 1 FRAME PICTURE
- 1 READ/WRITE TO GRAPHICON,  
RS-DDS DISK OR CASSETTE

**VIDX-1 - \$99.95 DIG.&SOFT.**

**VIDX-2 - \$124.95 DIG.&SOFT.**  
W/ 2 PORT RS-232 SWITCHER

PLUS \$3.00 POSTAGE

## GRAFX-MONTHLY GRAPHICS DISK

A MONTHLY COLLECTION OF ARTS  
SEASONAL MOTIFS AND HUMOR WITH  
MUSIC! JUST INSERT INTO DRIVE!

**SPECIAL NEW PRICE \$75.00**

**YEAR'S SUBSCRIPTION**

**3 MONTH TRIAL ONLY \$25.00**

**SAMPLE DISK \$10.00**

TO ORDER SEND YOUR CHECK OR M.O. TO:

**G R A F X**  
**P. O. BOX 254**  
**WEST HIFFLIN, PA 15122-0254**

VOICE LINE (412) 466-6974 (6-9PM)  
24 HR BBS- COCOBET (412) 744-2335- 300/1200BAUD  
- YOU CAN DOWNLOAD DIGITIZED PIX -

THIS COMPLETE AD PREPARED BY VIZIDRAW WITH NO  
CUTS OR PASTES!--COLOR COMPUTER IN TANDY CORP  
MACPAINT IN APPLE COMPUTERS



the number you've chosen. The number 1 is meant to produce a perfect circle. The number 2 gives a circle which is twice as high as it is wide, and 3 gives a 3-to-1 height/width ratio. Larger numbers, such as 255, squeeze the top and bottom of the circle against the screen, producing a box. Experiment with varied numbers to get the idea here.

By entering a number from 0 to .99, the height is made that percentage of the width. Example: the number .5 would give a circle half the height of its width. Again, experiment.

The final menu choice of Circle Tester is Start-End. It is possible to use the circle command to draw a section of a circle (an arc) which begins and ends at points you specify. This method is explained on page 45 of the manual.

In trying Start-End, you must enter two numbers separated by a comma. The first is the start point, the second the end point. Line 380 of the program shows the form with X representing start and Y the end point.

As in other menu choices, type your number choices and tap Enter to see the result. Then tap any key to return to the menu. Try these possibilities: .5,.75 / .25,.35 / 0,.80 and see what happens.

You might want to later go through the manual's chapter on circles. I have left out a few possibilities. I wanted only to cover the major concepts used in the main programs with this article.

When you have tried *Circle Tester*, I hope the circles and curved lines produced will have suggested possibilities to you. You now have the capability of producing an amazing variety of shapes. In the programs ahead you will see eyes, ears, noses, smiles, hair, heads . . . all produced with different kinds of circles.

Now it's time to try *Another Fine Mess*. It produces caricatures of Laurel and Hardy and plays a version of the duo's theme, which is known as the *Cuckoo Song*.

Let me cover the program:

#### • Laurel Sequence

220 Head shape.

230-260 Hat brim. Across axis of circle's center is X, which equals 50. By looping Y from 25 to 30, the lower part of a circle is drawn several times and thickens into the brim.

270 The rest of the hat is painted in.

280-300 Chin created and given a bit of emphasis by forming two lower circle sections with Y having subsequent values of 135 and 136.

310-330 Wide bottom half of circle drawn with Y having three descending positions, and smiling mouth results.

340-400 Eyes created. 310 begins a loop that occurs twice 30 positions apart. In each pass . . . 360 forms the large arch of the eye, 370 draws the circle of the eye's iris, 380 paints in the eye, 390 sets a light dot in the eye to give it sparkle, and 400 is the end of the loop.

410-420 These two line commands form the long ridges of the nose.

430 The rounded bottom of the nose connects the nose's two ridge lines.

440-460 Ears are made on either side of the head.

#### • Hardy Sequence

470 Head Shape.

480-500 A loop draws the mouth in a scowl of two thicknesses.

510 The bulbous nose

520-3540 Mustache is created by forming a high, elongated half circle, then stepping it down from the radius of 12 to 1.

560-580 Eyes. They are drawn in a loop which centers one eye on an X value on 145, the other on an X value of 185. Line 560 forms the found area to the left of the eye, and line 570 forms the iris.

590 The hat brim

600 The rounded derby's shape.

610 A small line is drawn, linking the top and bottom areas of the hat. This makes it possible for the coming single Paint command to spill over entirely within the derby.

*continued on page 23*


### Listing 3. Circle Tester

```
0 REM * CIRCLE TESTER * RICHARD RAMELLA
10 REM * TRS-80 EXTENDED COLOR BASIC 16K
20 CLS
30 PMODE 4,1
40 PCLS1
50 PRINT "<S>TART-END"
60 PRINT "<H>EIGHT-WIDTH RATIO"
70 PRINT "<R>ADIUS"
80 INPUT C$
90 IF C$="S" THEN 220
100 IF C$="R" THEN 300
110 IF C$="H" THEN 140
120 CLS
130 GOTO 50
140 CLS
150 PRINT "-- 1 TO 255 FOR HEIGHT"
160 PRINT "-- 0 TO .99 FOR WIDTH"
170 INPUT X
180 PCLS 1
190 SCREEN 1,0
200 CIRCLE(128,96),30,2,X
210 IF INKEY$<>" " THEN 140 ELSE 210
220 CLS
230 PRINT "FOR PART OF CIRCLE..."
240 PRINT "-- 2 NUMBERS FROM 0 TO 1
250 INPUT "START,FINISH";X,Y
260 PCLS 1
270 SCREEN 1,0
280 CIRCLE(128,96),40,2,1,X,Y
290 IF INKEY$<>" " THEN 220 ELSE 290
300 CLS
310 PRINT "FOR RADIUS OF A CIRCLE"
320 PRINT "---- 0 TO 65535"
330 INPUT X
340 PCLS 1
350 SCREEN 1,0
360 CIRCLE(128,96),X,2
370 IF INKEY$<>" " THEN 300 ELSE 370
380 END
```

The Biggest

The Best

The Indispensable

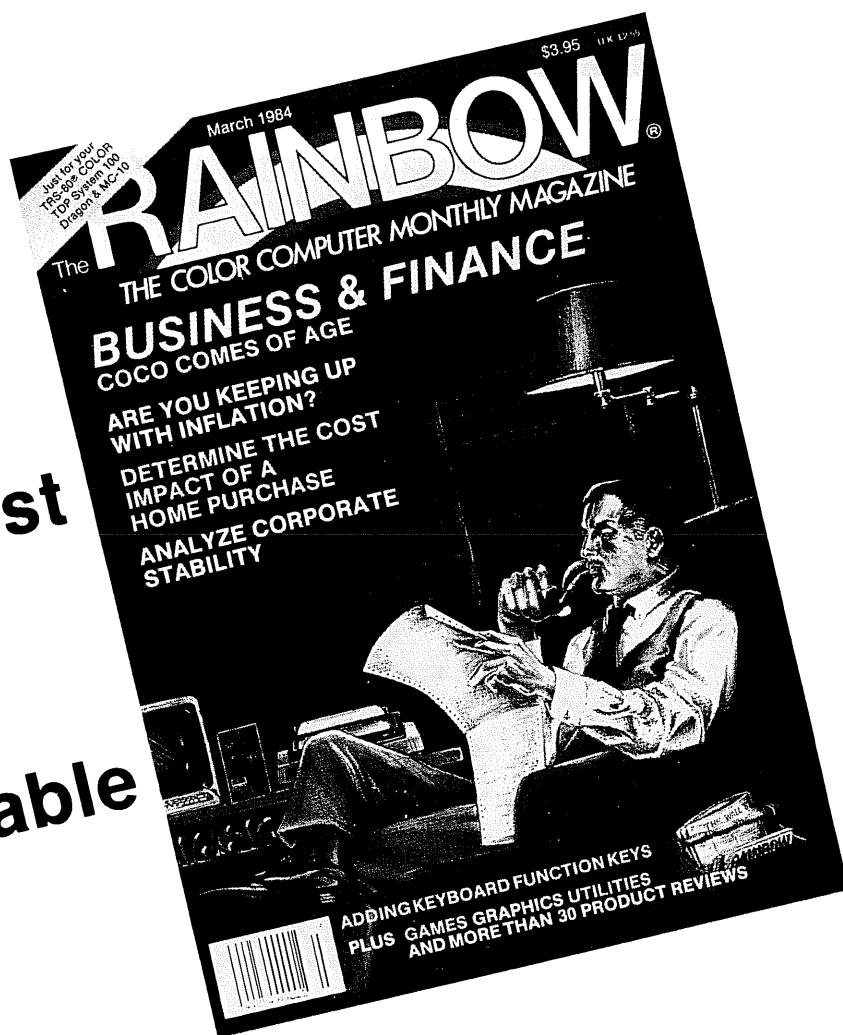

The latest news on the Color Computer grapevine is that more and more people are discovering **The Rainbow.**<sup>®</sup>

Now in its third year, **The Rainbow** has become the standard by which other Color Computer magazines are compared. And no wonder! **The Rainbow** towers above the crowd, now offering up to 300 pages each month, including as many as two dozen type-in-and-run program listings, a host of articles and in excess of 30 hardware and software product reviews.

We lead the pack in Color Computer publications and are devoted *exclusively* to the TRS-80<sup>®</sup> Color, TDP-100 and Dragon-32. We made our climb to the top by continually offering the best and the most by

such well-known authors and innovators as Bob Albrecht and Don Inman, and games from top programmers like Robert Tyson, Fred Scerbo and John Fraysse. **The Rainbow** offers the most in entertainment and education, home uses, technical details and hardware projects, tutorials, utilities, graphics and special features like Rainbow Scoreboard and our CoCo Clubs section.

For only \$28\* a year, you get the keys to all the secrets locked in your CoCo!

Are you searching through the jungle of claims and clamor? Climb above it all. Look up. Find **The Rainbow.**

**THE RAINBOW**  
(502) 228-4492

9529 U.S. Highway 42  
The Falsoft Bldg.  
P.O. Box 385  
Prospect, KY 40059

**THE RAINBOW** is a publication of Falsoft, Inc.



\*Subscriptions to **the RAINBOW** are \$28 (\$31 after Jan. 1, 1985) a year in the United States. Canadian rate \$35 U.S. (\$38 after Jan. 1, 1985). Surface rate to other countries \$65 U.S. (\$68 after Jan. 1, 1985); air rate \$100 U.S. (\$103 after Jan. 1, 1985). All subscriptions begin with the current issue. Please allow up to 5-6 weeks for first copy. U.S. FUNDS only.

Prices subject to change.

YES! Sign me up for a year (12 issues) of **THE RAINBOW.**


Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_

Payment Enclosed ☐  
Charge Visa ☐ MasterCard ☐ American Express ☐  
My Account# \_\_\_\_\_  
Signature \_\_\_\_\_ Card Expiration Date \_\_\_\_\_

In order to hold down non-editorial costs, we do not bill for subscriptions.

# The Data Gatherer

By Dennis Kitz

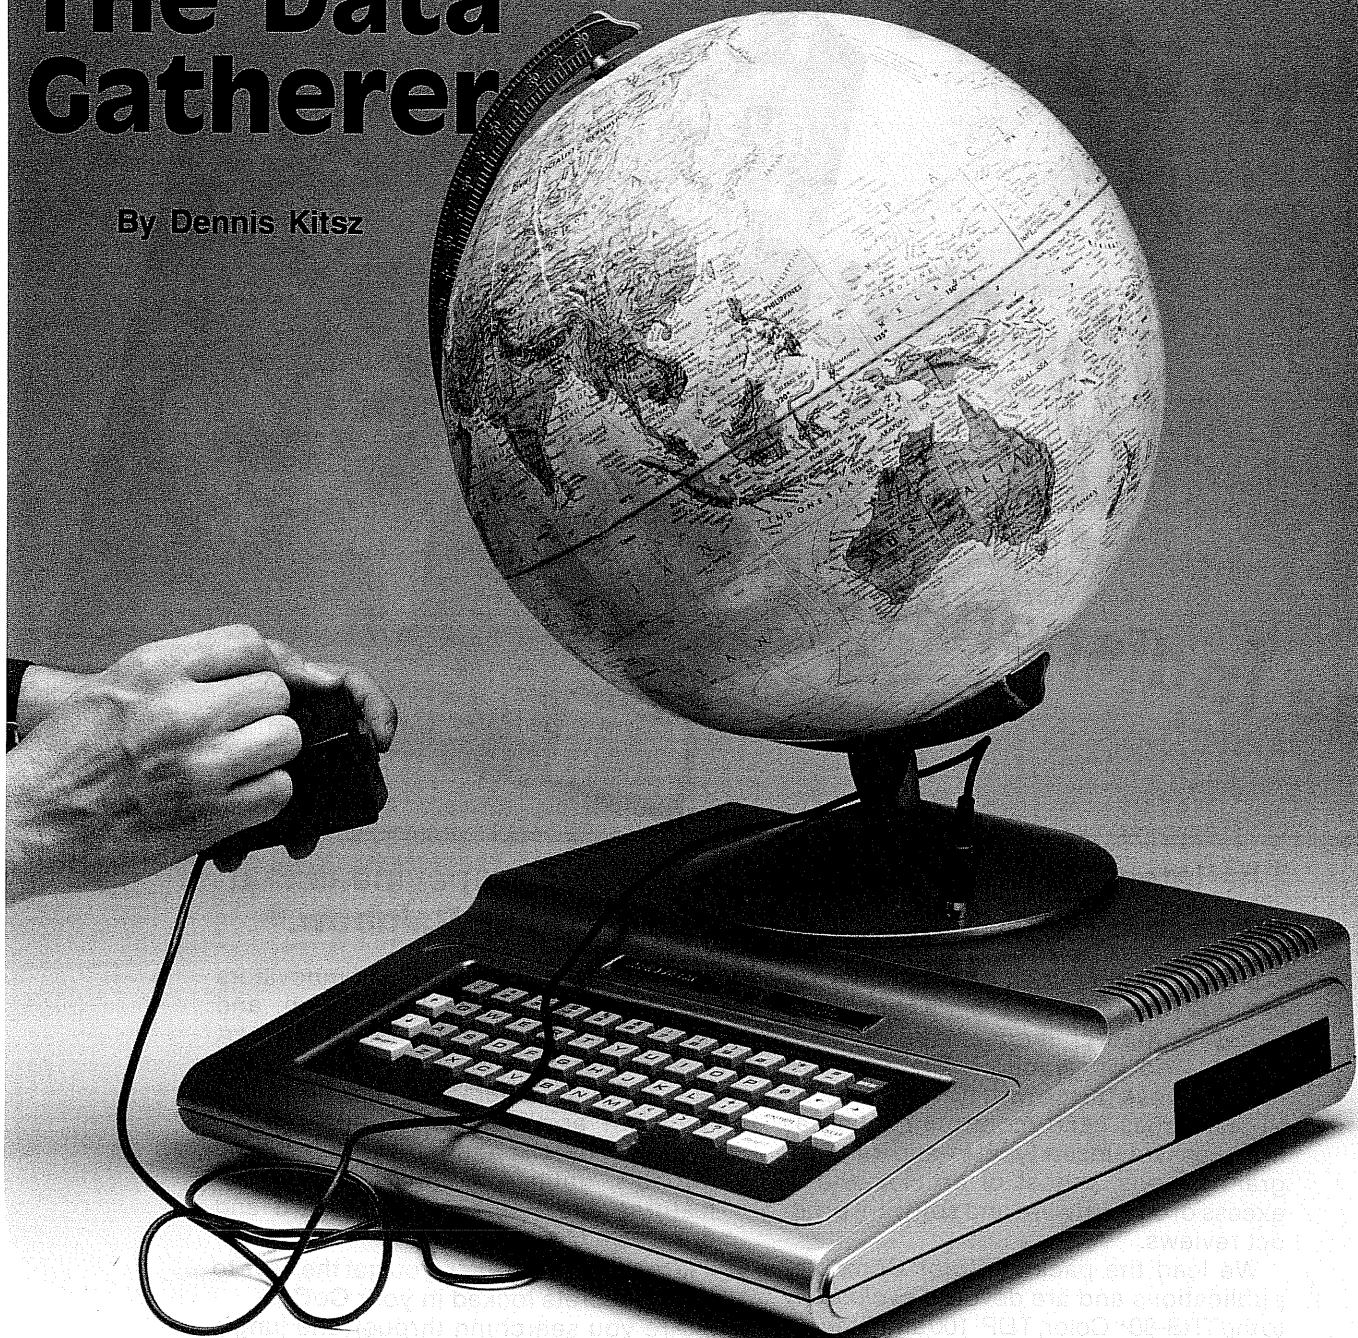

Things develop in odd ways: in the past two issues I've been working up to a talking real-time clock/calendar, but (how can I say this?) I got distracted. The implications of its battery-back-up real-time clock were powerful for an experimenter like myself, and soon another project drew me away. So for the next few issues you'll be reading about the Data Gatherer, a complete data acquisition system for the Color Computer. (Yes, I will get back to the other talking clock/calendar!)

A data acquisition system is techie jargon for a reasonably accurate, flexible method of interfacing "real world" events to a computer—real signals, real voltages, real time. The Date

Gatherer can convert a digital value into a voltage with an accuracy of .025 percent, and can convert a voltage into a digital value with the same accuracy. It can keep the real time, with a battery to keep the time accurate when the computer is turned off, read and set the time, and use the time to trigger computer program segments. It can send or receive digital signals, (in the specific example used here, as a parallel printer port). And, when you turn the power on, its operating system can automatically install and execute a Basic program from read-only-memory (ROM). And finally, it can be used together with other ROM packs or with a disk system.

The Data Gatherer, like the speech synthesizer, makes



use of the interfacing principles and hardware of the CoCoPort (*The Color Computer Magazine*, April–May 1983). The Data Gatherer is also completely modular—you can construct one, two, three or all four of its major sections and use those sections independently.

### Analog-to-Digital Conversion

Essential to computer analysis of any non-digital (real world or analog) information is a way to convert that analog information into digital form.

In some cases you've already got digital-like events to analyze, and those demand no special conversion. The number of customers passing through a door, for example, can be counted one at a time (on-off-on-off-on-off). That counting is inherently digital or binary. To record the weight of those customers, however, you would have to measure and convert the weight into computer numbers. A simple electronic alarm system is already digital because you need to detect only whether a window is open (window switch on or off) or if a light beam has been interrupted (beam on or off). On the other hand, in order to determine an intruder's exact position in a building, you must measure and convert a value into computer terms.

What if you wanted to keep track of the electricity coming into your home? Knowing if the electricity is on or off is a digital event; but measuring the actual voltage is more difficult, and that's a similar problem to how joysticks are used.

Atari-style joysticks are four simple on-off switches. Each switch determines one direction or none—up, down, left, right, off—and any two neighbors can both be clicked on—up-left, up-right, down-left, down-right. Radio Shack joysticks are more sophisticated, permitting not just the nine positions Atari allows, but 64 unique positions in each direction, a total of 4,096 distinct locations. (Refer to Issue 1 for more details about the Color Computer joysticks.)

To measure an actual voltage, then, you've got to come up with an analog-to-digital conversion process that's accurate enough for whatever you need to measure.

There are two major ways of performing the conversion—hardware-intensive or software-intensive. (Sound familiar? Computer applications *always* involve trade-offs between hardware and software solutions.) The hardware-intensive solution uses a complete analog-to-digital integrated circuit which, when kicked by the computer, measures voltage, and a few microseconds later reports the result to the computer. This is fast, effective—and costly. Complete 12-bit (.025 percent accurate, or one part in 4096) analog-to-digital converters cost \$150 or more each.

With the exception of its greater attention to detail, the software-intensive solution for accurately measuring an analog value is identical to the joystick input process. The computer software calculates and outputs a value to a digital-to-analog converter (much cheaper—about \$20). The value is altered and compared via software until the computer finds a match. The Data Gatherer uses this solution, called successive approximation.

### Digital-to-Analog Conversion


At the heart of the Data Gatherer is a digital-to-analog converter. The governing principle of such converters is binary "weighting"; that is, each binary digit of a binary word has a value, or weight, twice that of its neighbor. Here's a simple example:

In decimal terms, the binary word 000001 is 1, 000010 is 2, 000100 is 4, 0010000 is 8, 010000 is 16 and 100000 is 32. Each position is twice that of the previous. Complex binary words can be converted to decimal form by summing each of the individual bit values: 101110 is  $32 + 0 + 8 + 4 + 2 + 0$ , or 46.

This same mathematical conversion can be applied to converting binary numbers into voltage. Hook the computer to a "black box." The black box assigns values to each bit, based on its "weight" within the binary word. That is, if the right-most binary digit is worth one, then the black box outputs  $1/64$ th of a volt; the next binary digit is worth two, and the black box assigns it  $2/64$ ths of a volt; all the way up the left-most binary digit, worth 32, and assigned  $32/64$ ths of a volt. The binary example above (101110) then becomes the sum of the individual binary digits (46), and the black box outputs  $46/64$ ths of a volt.

The original grey-case Color Computer had the simplest kind of digital-to-analog (D/A) converter, known as a resistor ladder. See how, in the sketch below, each resistor is twice the value of the next, meaning the voltage getting through each resistor is only half the value of its neighbor. The far ends of all six resistors are wired together, resulting in a sum of all the weighted voltages. In the Color Computer, not one volt, but rather five volts are sent to the top of the resistor ladder, meaning the output voltage is divided (scaled) into  $5/64$ ths of a volt (.078 volts) per binary digit of measurement.

In summary, then, a six-bit digital-to-analog converter has a scale running from 0 volts (binary 000000) to 4.92 volts (binary 111111) in steps of .078 volts (1 bit). Take a look at Figure 1.

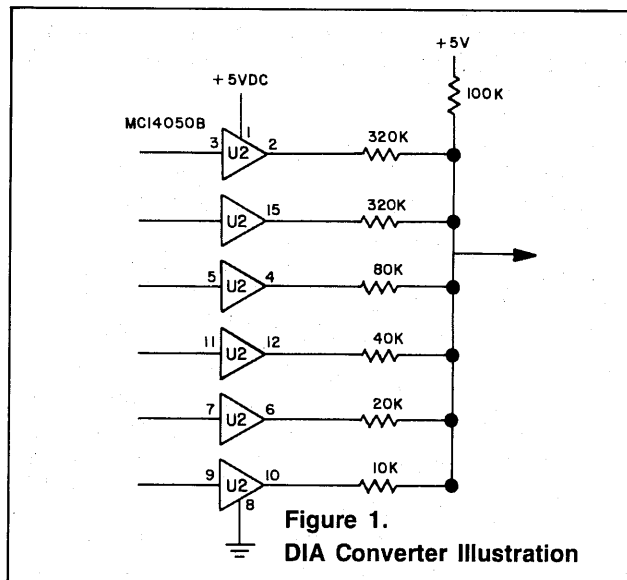

To get good precision (even at six bits), the resistors must be accurate to within one bit or less (better than one part in 64). This means that for reasonable precision the resistors used in the ladder should be 1 percent types (one part in 100 accuracy). A check of the Color Service Manual reveals that, yes indeed, Radio Shack used 1 percent resistors—10K, 20K, 40.2K, 80.6K, 162K and 324K.

The Color Computer has only a 6-bit D/A converter, but the Data Gatherer uses a 12-bit D/A converter. What does this mean? It means that the least significant bit of the Data Gatherer's converter is  $1/4096$ th of a division—an accuracy

of .0244 percent. On the same scale of the Radio Shack machine, this means the scale runs from 0 volts (0000 0000 0000) to 4.9987 volts (1111 1111 1111), with each division worth just .0012 volts.

Inside the Data Gather's converter (an Analog Devices type AD667) is a simple resistor ladder. But since Analog Devices states that the AD667 is accurate to within 1/2 bit, it means they have produced resistors with an accuracy of at least .012 percent—100 times more accurate than the 1 percent precision resistors in the Radio Shack machine. This is done by "laser trimming" each resistor until it meets the manufacturer's specifications, a process that drives the cost up quickly.

Just for comparison, the total cost of the parts in the Radio Shack computer's D/A converter (seven resistors, one CMOS buffer) is about 20 cents in quantities of 100. The Analog Devices AD667s cost \$20 or more each in quantities of 100—100 times the accuracy, 100 times the cost.

A block diagram of the AD667 is presented in Figure 2. I'll discuss later the details of the 4-bit latches shown; beyond that, notice the complete simplicity of the device . . . a latch to hold the digital data accurately in place during conversion, level translator and resistor ladder (marked 12-bit high speed DAC), and a scaling amplifier. The amplifier allows the user to select the full voltage scale across which the D/A converter can be used: 0 to 5 volts or 0 to 10 volts. Later I'll give you a few application ideas for using the two scales.

#### Real-Time Clock/Calendar

I am planning to save this one for the talking clock/calendar project, and so you'll get very little of the theory and ideas behind the clock/calendar itself right now. Instead, I'll present an interesting hardware trick for fitting a lot of trinkets into a little box. (If you're interested and absolutely must know about the clock/calendar, take a look at Figure 3 for an idea of how thoughtfully designed this \$15 microprocessor-compatible clock/calendar is.)

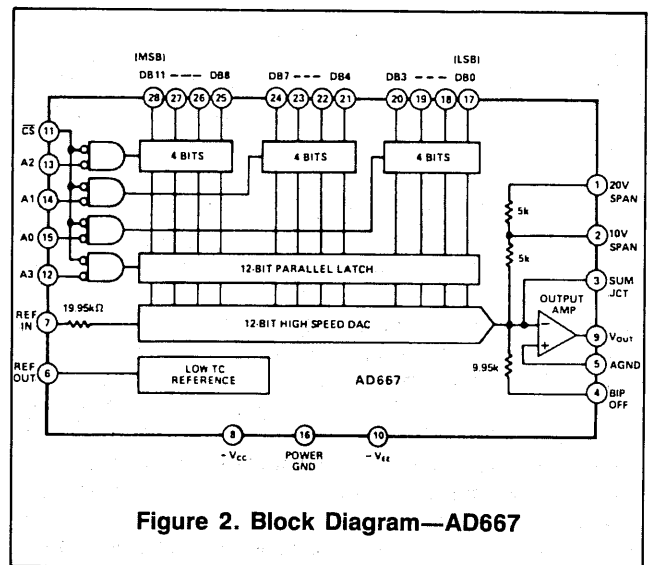


Figure 2. Block Diagram—AD667

To implement the clock in a full-blown Color Computer system you need some background about its unique arrangement. The Color Computer uses a 6809E microprocessor, its brain, which can address 64K (65,536 bytes) of memory. When this microprocessor is paired with a special memory management circuit known as the Synchronous Address Multiplexer (SAM), that map of 64K bytes is organized and expanded. That expansion includes the ability to address 96K (98,304 bytes) of memory—and possibly more than that in newer versions of the SAM.

Of particular interest is how the SAM organizes the top page (highest 256 bytes) of memory. This small section of memory has been cordoned off for control purposes. Briefly, that involves signals for choosing graphics modes, using the keyboard peripheral interface adapter (PIA), using the cassette

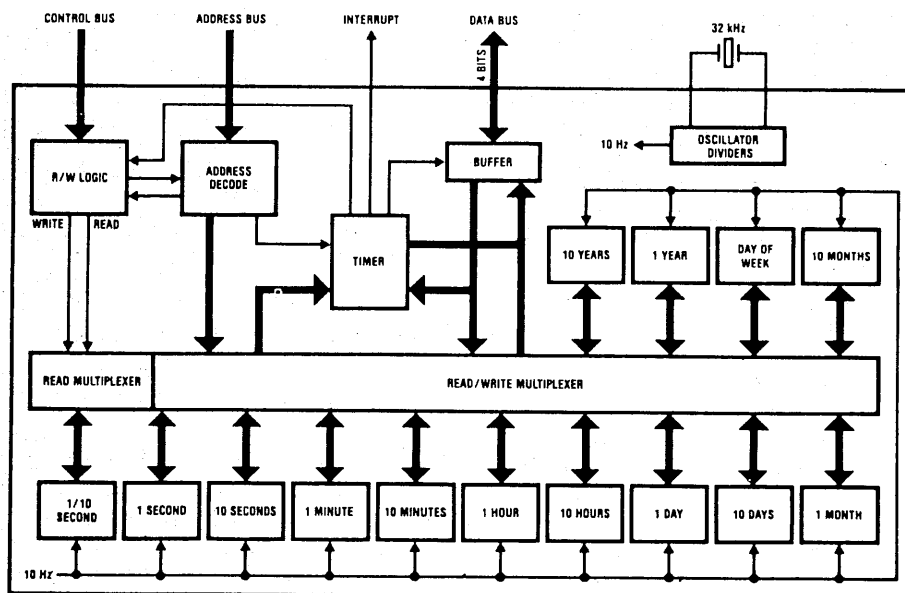


Figure 3. Block Diagram

motor and joystick PIA, etc. One signal from the SAM (labeled SCS\*, or not-spare-chip-select) is reserved to distinguish a block of 32 addresses in memory from location \$FF40 to \$FF5F (decimal 65344 to 65375).

It is this block of 32 bytes that the Radio Shack disk pack uses to read and write, select, and run the motor of your disk drives.

It also turns out that a standard disk drive doesn't actually need all 32 of these addresses, although (for unknown reasons) Radio Shack chose to identify the 16 addresses from \$FF40 through \$FF4F are reserved in its software. Nevertheless, by cleverly demultiplexing (decoding) the block \$FF40 to \$FF5F, the large 32-byte block can be split into one 16-byte section for the disk and one 16-byte section for your own use. These latter 16 bytes can be further multiplexed into four groups of four. Such is the principle of the CoCoPort.

The Data Gatherer is going to need some of those spare 16 addresses for the digital-to-analog converter for the analog-to-digital converter and its channel-selection process (more on that next time), as well as for a printer port.

But a problem arises. According to the manufacturer's data, the real-time clock/calendar alone requires all 16 addresses; in Table 2, you can see that 14 addresses (1-14) are used for reading from tenths of seconds of tens of years, and the two remaining addresses (0 and 16) are used for controlling the clock/calendar's operation and for setting the clock.

How can the D/A converter, A/D converter and printer have *their* 16 addresses if the clock/calendar wants to hog them all? Or conversely, if we don't put the clock there, how can the disk drive have *its* 16 addresses? Examine the Data Gatherer block diagram (Figure 1). The "decode" area is the \$FF40-\$FF5F demultiplexer, and it selects respectively: a PIA for the D/A converter; a PIA for the A/D converter input

and printer; the real-time clock; and (immediately below the block marked "R/W\* logic") the disk drive selector.


Look at the "R/W\* logic" part of the diagram. This section directs a block of 16 addresses either to the disk drive or to the clock/calendar. It isn't done with mirrors, but it's close.

Fortunately, all the rest of the Data Gatherer's contraptions won't require 16 addresses (actually only eight) so there are a few free. One of these free addresses is a kind of "which-one" selector. By storing a zero at \$FF58 (decimal 65368), you permit the disk to be used; by storing a one at \$FF58, you permit the clock to be used. The circuit is a simple flip-flop, triggered by the data written to \$FF58: flip, it's the disk, flop, it's the clock.

Generalize this process. It is the heart of "bank selection," a term which you will hear applied to many things, from choosing among various peripherals (Radio Shack's Multipak is a kind of heavy-handed hardware bank selector) to turning on one among several large blocks of memory (RGS Micro's 128K adaptor for the CoCo requires bank selection to give you that much RAM).

Your "32K/64K" Color Computer is a bank-selected machine, too. When you are using Basic, you have 32K RAM, 8K ROM (Color Basic), 8K ROM (Extended Basic), 8K ROM (Disk Basic), and 8K unused . . . a total of 64K. When you are using a special 64K RAM program such as a word processor (VIP Writer, TeleWriter, etc.), the three Basic ROMs are turned off and the upper 32K RAM is turned on in their place. That's bank selection.

So to fit all these electronic contraptions into one little block of available memory, you have to resort to the type of fancy footwork called bank selection. As I said, there will be more about the clock itself when I pick up the talking clock/calendar project in a few weeks. (end)

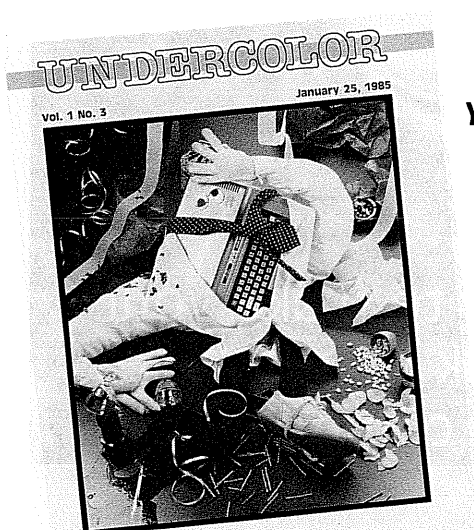

**To: UNDER COLOR, BOX 6809, ROXBURY, VT 05669  
(802)485-6440**

**Yes! Sign me up for UNDER COLOR as a Charter Subscriber!\***

\_\_\_\_\_ 1 year (26 issues) \$26\* (by first class mail, \$38)  
\_\_\_\_\_ 2 years (52 issues) \$40 (by first class mail, \$68)

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_


Single issue price \$2. Canada/Mexico yearly rate \$US30. Other countries \$US40; air mail \$US52.

\* Offer expires January 31, 1985



# CROSS TALK

## Part II

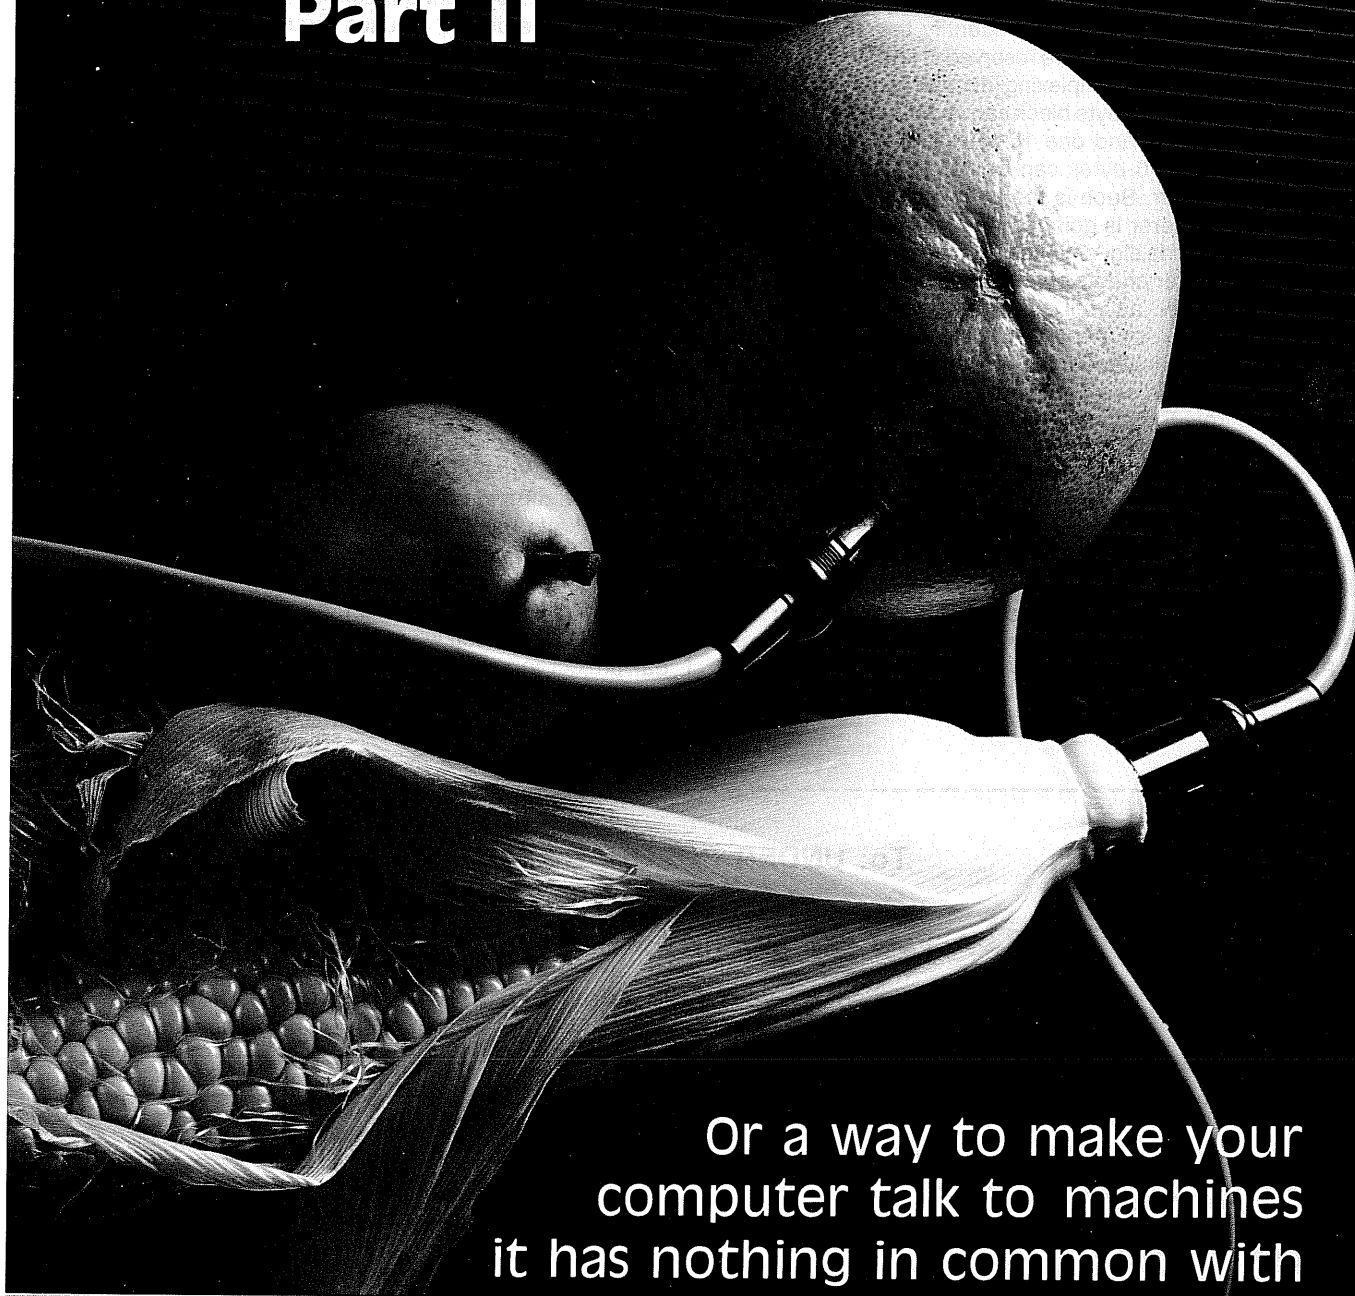

Or a way to make your  
computer talk to machines  
it has nothing in common with

By William Barden, Jr.

Last month, Bill explained what RS-232C is, told us about bauds, and presented some programs to use. This month he tells us what we can do with them! Refer to part one for the programs.

You can easily use the program to connect two Color Computers and pass data between them. Prepare a cable as follows:

Get two 4-pin DIN connectors from Radio Shack (274-007). Solder a three-wire cable between the two connectors, as shown in Figure 1. In this configuration the TD signal from one side goes into the RD signal for the other system, and vice versa.

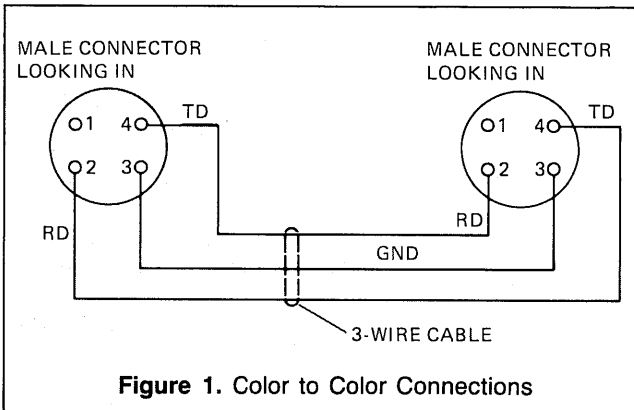


Figure 1. Color to Color Connections

Load the program into both computers. Start the receiving system by calling the Input Character routine after POKEing the starting and ending locations of the memory area to be filled with data (or use the screen addresses). Next, start the transmitting system by calling the Output Character routine from Basic. If you're using the terminal program above, you can start either system first.

If you're using the program to transfer data between your Color Computer and another computer system, you may have some difficulties—not on the Color Computer end, but in the connection with the other system. Other computer systems use additional signals beyond the 22 RS-232C signals to establish a protocol. There are no clear-cut rules by which signals are used. It may be necessary to "dummy up" some of the signals on the other system to fool it into thinking the signals are being properly received from the Color Computer. This is done by routing an output signal to an input signal on the same end. It may be necessary to do this for several signals, and you may have to wire a special DB-25 plug to accomplish this. A convenient plug to use is the Radio Shack male DB-25 (276-1559). Regardless of the signals dummied up on the other end, there need be only three signals on the Color Computer end. A typical configuration is shown in Figure 2.

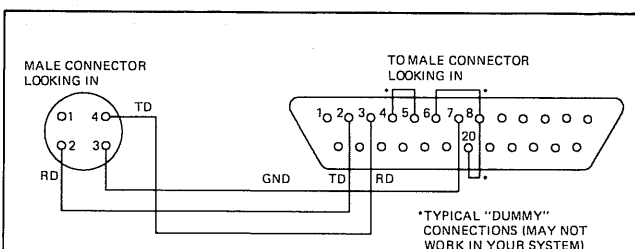


Figure 2. Color to Other Computer Connections

### To Peripheral Device

You can also use this program to communicate with peripheral devices, such as printers and plotters. For reference only, the line printer-driver subroutine in ROM uses three lines, but not in the same way we've been connecting devices here. The RD line is used as a status line to indicate whether the line printer or other device is ready to receive data, as shown in Figure 3. This line must normally be kept at a voltage level of greater than +3 volts, or must be connected to an appropriate status signal from the device.

If you're using the Character Output routine to transmit data to a printer you'll need only the TD and ground lines. Connect the TD line to the RD printer input and the ground line to the ground printer line. Again, it may be necessary to dummy up some of the other lines on the printer end, as shown in Figure 4.

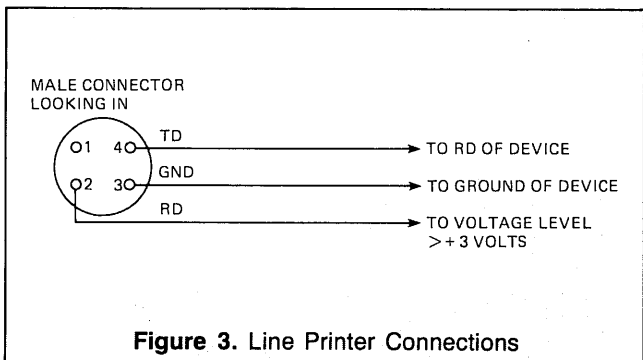


Figure 3. Line Printer Connections

### Data-Buffer and Overrun

Using the RD line as a status indicator is an excellent idea. Don't forget—if you're sending data to a peripheral device, that device must be able to keep up with the data transmission rate. If a printer operates at 180 characters per second, for example, and you're sending data at 2400 baud (240 characters per second for 10-bit characters), you'll quickly overrun the printer. Most printers or other peripherals have some buffering that allows the device to save a limited number of characters, usually hundreds. Buffering lets the device receive bursts of data at high-speed rates, and then empty the buffer (a temporary storage spot) during periods when no transmissions are taking place.

If data overruns the buffer, data following the overrun will be lost. To overcome this problem, other RS-232C lines, such as RTS (request to send), are typically used, but our program makes no provision for a return of status.

You might notice in the Basic terminal program that characters are occasionally lost. This usually occurs for repeated characters, such as the second O in good; it happens because of the speed restrictions of the Basic keyboard scan routine. Characters sent from within a program will not be lost.

We've barely scratched the surface of RS-232C. Use the program to experiment with your own data communications applications. At another time I'll show you how a slight modification of the basic program can be used to implement your own terminal program for communication with CompuServe and other data communications networks. (end)

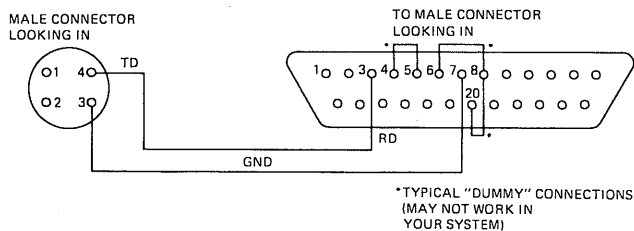


Figure 4. Printer Connections For RS-232C Program

The assembly language program really just implements what we've discussed here. On the output side, a zero bit is output to PIA \$FF20 for one bit time. Next, the number of specified data bits are output through the \$FF20 PIA a bit at a time, starting with the least significant bit. Finally, a one stop bit is output to PIA \$FF20 for one or two bit times. The output on the TD line is left in the stopped state.

On the input side, the RD line is monitored by reading PIA \$FF22. Whenever a zero bit is detected, the program starts counting by a delay loop based on the baud. After 1 1/2 bit times the first data bit is read. The remaining bits are read and assembled into 7- or 8-bit characters. After the last data bit has been read, the program delays for the following stop bits.

Two delay loops delay either one bit time (DELAY) or one-half bit time (DELAYH). A delay count is obtained from a baud table indexed by the baud code (0-7). Note that the delay counts are slightly different for output and input, reflecting the slightly different numbers of instructions for each operation. As each instruction executes in a fixed time, the delay count is determined by considering the time through the program delay loop plus some additional "overhead" for other operations. You may try changing the table values slightly to alter the bit times if you add additional assembly language code in the program. Send constant characters to determine minimum and maximum values for error-free transmissions, and then choose an intermediate value for each baud.

The keyboard scan in the Input Character routine quickly reads all keyboard columns to determine if a key has been pressed. Using the Basic ROM subroutine proved to be too slow to avoid data overrun at higher bauds. Similarly, using the ROM subroutine for Display Character proved to be too slow at the end of a line when the screen was scrolled. Several characters are lost during the scrolling time.

# Hints, Tips, and Tricks

By Terry Kepner

**Printer**—To route all normal text output from the screen to a printer, type POKE 360,162:POKE 361,191. If you are in Color Basic, add POKE 359,126. To restore normal print operation, type POKE 359,57 in Color Basic: POKE 360,130:POKE 361,115 in Extended Color Basic; or POKE 360,203:POKE 361,74 in Disk Basic.

**Programming**—To protect video information from scrolling off the screen, POKE 359,16 for a cassette system, or POKE 359,0 for a disk system. After this POKE only PRINT @s and POKES to the video memory will show up on the screen. To restore normal operation, type POKE 359,126.

**Printer**—To check your printer's on/off status, PEEK (65314) and PEEK (65318). If you get four, everything is OK, but a five or seven indicates the printer is off, or offline.

**Disk Basic**—To turn your drive motors on, type POKE &HFF40,60. To turn them off, type POKE &HFF40,0. This eliminates the wait time before reading and writing data to your disks. The drives are also turned off by normal disk commands.

**Programming**—For less consistent random numbers (RND function always starts with the same sequence), add this to the start of your programs: POKE 280,PEEK(275). Location 280 is one of the RND seed addresses, and location 275 contains a constantly changing number.

**Disk Basic**—To disable Disk Basic without unplugging the ROMpak cartridge, type POKE 298,0:POKE 303,0. This makes Basic ignore all the Disk Basic commands. To restore normal operation, type POKE 298,25:POKE 303,14. Reset won't do the job.

**Disk Basic**—To get a printed copy of your disk directory and the remaining free granules, type POKE 111,254:DIR:PRINT#2, "Free = ]":PRINT#2, FREE(0). This can, of course, be put into a program.


**General**—To clear all memory and cold start your computer, type POKE 113,3:EXEC 40999.

**ROMpak**—To dump a ROMpak to cassette, put a piece of tape over pin 1 of the ROMpak (the leftmost pin as you look at the ROMpak connector, label up), plug it into your computer, and turn it on. Set up your cassette recorder and type CSAVEM"filename",&HC000,&HFEFF,&HC000.

**Printer**—The pens on the Radio Shack CGP-115 printer plotter dry out if not used every day or two. If you turn it on every day, the start-up sequence is enough to keep the ink flowing evenly. The best idea is to buy a power strip and plug all your equipment into it. Whenever you use your computer, your printer will automatically go through its start-up sequence without your having to do it explicitly.

**Disk Basic**—To protect your disk programs/files from unauthorized access, save them with a graphics code embedded, i.e., SAVE"file"+CHR\$(143). The file will list in the directory, but you can't reload it unless you use the same method as you used to save it: LOAD"file"+CHR\$(143). CHR\$(143) is a graphics space, so no one will know it's there but you!



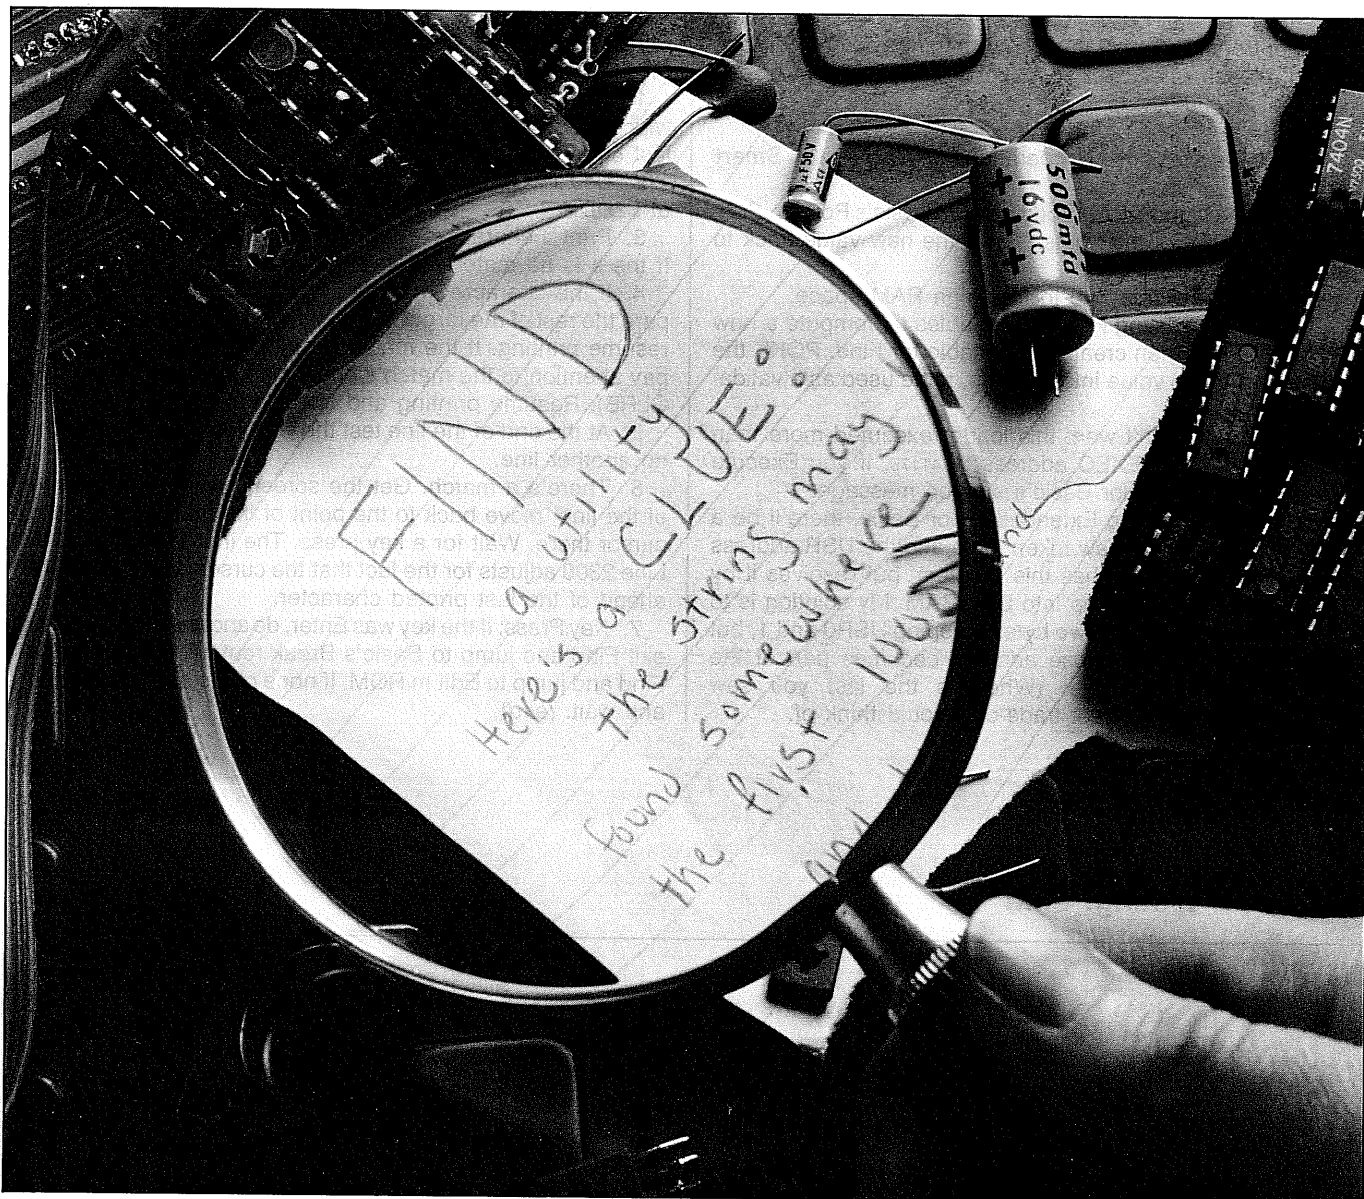

## By Stephen P. Allen

Remember "System Horizons" (*TCCM*, July '84)? "Find" is a follow-up to that article, and it has finally found a home!

To disassemble Basic ROMs; to be an "insider" on the real processes taking place in your computer; these impart fun and satisfaction, but more satisfying is taking Basic's own subroutines and using them to create your own programs. You'll get a great deal of power from a very small piece of code.

What does Find do?

Say you've been working on a long Basic program and you keep getting ?FCERROR in a line you know is legal. Suddenly you realize you need to change a single occurrence of N\$(A) to N\$(B). You can do nothing but List the program, hitting Shift @ 'til you find it (if you find it; oops! Try again . . .), then Break and Edit the correct line. A drag, right?

The Find utility lets you type FINDN\$(A) and enter. A listing instantly appears and scrolls furiously by, just as in List. When a line containing the target string is listed, however, the display freezes and a gentle blue cursor marks (in this case) N\$(A)'s position in the line.

At this point you have three options. You can hit Break and break out of Find, or you can hit Enter and continue the listing and search. Or (and this is the best part), you can

hit E and go immediately to Extended Color Basic's Edit routine.

Want to search for the same string a second time? Just type FIND and enter. Find has its own 10-character buffer, so that's your maximum target string length.

How about wild card searches? Sure! The symbol is #.

Searching for PR##T will locate PRINT, PRESTO, PR\$(T), etc.

If you're searching for a string containing a Basic word, use a single quotation mark before the word. For example: FIND"PUT. The quotation mark keeps Basic from turning the string into a token, and is good practice generally, since (for example) NONE without the mark is tokenized into N/ token for ON/E. Find understands the quotation mark and skips it when it's the first character.

If your Basic program is already in memory and you need to load Find, don't worry. Find has two parts: the guts, which contain the routine, and the Pretty Smart Loader, used only once, which sets up operation of the routine. Together, they load into low graphics memory. Even if you've executed PCLEAR1 you're OK. Just (C)LOADM and Execute to set it up, and you're in business.

All this power takes only 250 bytes!

Note: from here on, if there's something you don't understand, please refer back to "Exploring System Horizons" (TCCM, *July '84*).

1. Get the highest RAM address from Basic's Pointer. Subtract the length of the "guts." Give the new value back to Basic.

2. Copy the "guts" up to that high RAM space.
3. Use the existing RAM token tables to compute a new token for Find, then create a new table for Find. POKE the calculated token value into the guts, to be used as a validation check.
4. Since we don't want this loader executed more than once, change the EXEC address to 41175. If you Execute again, you'll get Color Basic's sign-on message.
5. If you're running Extended Color Basic, there'll be a conflict between the new token table and the USR address table. Disk Basic also has this problem, but resolves it by moving the USR table up into Disk RAM. My solution is to move the USR table up two bytes, keeping USR0 and 1, but taking away USR9, whose address becomes part of the keyboard roll-over table! (When is the last you saw DEFUSR9?) It's the best trade-off I could think of.

1. Evaluate and store the target string. This is the string which Find will try to match. If no string is specified, use the last string.

2. Use a ROM call to de-tokenize the next line into a buffer at \$2DD.
3. Print a character from the buffer, testing for a match. If there is no match, keep printing and checking.
4. If the character matches, suspend printing and compare the rest of the target string. If the rest of the match fails, resume printing. If the match is successful, set a flag and pay attention to the match's position in the line (Line 2100, CLRB). Resume printing and checking.
5. At the end of the line test the flag. If there is no match, do another line.
6. There's a match. Get the screen position of the end of the line, move back to the point of the match, and set a cursor there. Wait for a key press. The instruction INCB in Line 2300 adjusts for the fact that the cursor points one byte ahead of the last printed character.
7. Key Press: If the key was Enter, do another line. If Break, exit Find and jump to Basic's Break routine. If E, then exit Find and jump to Edit in ROM. If none of the above, go back and wait. (end)

Address	Op Code	Op Name	Comments
00100	*****		
00110	**		
00120	**	FIND	
00130	*****		
00140	**	A New Word For	
00150	**	Basic	
00160	*****		
00170	*	by	
00180	*	Stephen P. Allen	
00190			
00200			
00210			
00220			
00230	*	For Disk Basic use this ORG	
00240	ORG	\$F00	
00250			
00260	*	For Extended Basic use this ORG	
00270	*	ORG	\$700
00280			
00290	*****		
00300	*	THE	
00310	*	PRETTY SMART	
00320	*	LOADER	
00330	*****		
00340			
00350			
00360			
00370	***	MAKE ROOM UP TOP	***
00380			
00390	LENGTH EQU	ZEND-TITLE	
00400			
00410	START	LDD	<\$74 High Ram address
00420	SUBD	#LENGTH	-Find's length
00430	STD	<\$74	=New "High Ram" address
00440	STD	<\$27	and "Top of String Space"
00450	STD	<\$23	and pointer to next string
00460			
00470	SUBD	#200	default total string space
00480	STD	<\$21	to "Start of String Space"
00490	LDS	<\$21	Stack goes below strings
00500			
00510	***	MOVE IT UP	***
00520			
00530	LDU	<\$74	New "Top of Ram"
00540	LEAU	2,U	(a little space, just in case)
00550	LEAX	<TITLE,PCR	Start of "FIND"
00560	LDY	#LENGTH	of "FIND"
00570	LDA	,X+	
00580	STA	,U+	
00590	LEAY	-1,Y	
00600	BNE	PUTHI	
00610			
00620			
00630	***	TELL BASIC WHERE TO FIND IT	***
00640			
00650	LDU	#\$116	Address of (token tables-10)

0F29 5F	00660	CLRB	Token will form here	0F5F 81	CE	01200	01210	FIND	CMPA	#\$CE	If disk, this will change
	00670			0F61 27	03	01220	01230		BEQ	OK	yes, correct token
	00680			0F63 7E	B277	01240	01250		JMP	\$B277	else ?SN ERROR
0F2A 33	4A	TABLE	10,U			01260	01270	*** GET THE PARAMETERS ***			
0F2C EB	C4	ADDB	,U			01280	01290	OK	JSR	<\$9F	next character
0F2E 6D	C4	TST	,U			01300	01310		BEQ	FIND2	if null, use previous string
0F30 26	F8	BNE	TABLE			01320	01330	* A string is specified			
	00700					01340	01350				
0F32 CB	80	ADDB	#\$80	0F66 9D	9F	01360	01370				
0F34 6F	4A	CLR	10,U	0F68 27	1C	01380	01390				
0F36 86	01	LDA	#1			01400	01410		LEAX	TARGET,PCR	Point to buffer
0F38 A7	C0	STA	,U+			01420	01430		CLRB	Length of string so far, 0	
	00780					01440	01450		CMPA	#"	String delimiter?
	00790	*	Recalculate start of "FIND"			01460	01470		BNE	LOOP1	
	00800					01480	01490		JSR	<\$9F	if so, skip it
0F3A 9E	74	LDX	<\$74			01500	01510		BEQ	FIND2	if nothing else specified
0F3C 30	02	LEAX	2,X			01520	01530				
0F3E AF	C1	STX	,U++			01540	01550		STA	,X+	character into FIND's buffer
	00840					01560	01570		INCB	length=length+1	
0F40 30	04	LEAX	4,X			01580	01590		CMPB	#10	max # of chars?
0F42 AF	C4	STX	,U			01600	01610		BHS	DONE	if yes, skip the rest
	00860					01620	01630		JSR	<\$9F	else get next char.
	00870					01640	01650		BNE	LOOP1	if another char, loop back
0F44 E7	01	STB	1,X			01660	01670				
	00880	*	New token also goes directly into routine *			01680	01690		STB	LENTS,PCR	Store string length
	00890					01700	01710		LEAS	2,S	Drop return address
	00900					01720	01730		LDX	#\$19	Has address of first line
	00910					01740	01750		STX	<\$66	Save for LIST loop
	00920	*	Change EXEC address to disable Loader			01760	01770				
0F46 8E	A0D7	LDX	#41175	0F82 E7	8D 00C3	01780	01790				
0F49 9F	9D	STX	<\$9D			01800	01810				
	00930					01820	01830				
	00940					01840	01850				
	00950					01860	01870				
	00960					01880	01890				
	00970					01900	01910				
	00980	*	Move DEFUSR table if necessary*			01920	01930				
	00990					01940	01950				
0F4B DC	B0	LDX	<\$80			01960	01970				
0F4D 1083	013E	CMPD	#\$13E			01980	01990				
0F51 26	04	BNE	JUMP			02000	02010				
0F53 C6	40	LDB	#\$40			02020	02030				
0F55 DD	B0	STD	<\$80			02040	02050				
	01030					02060	02070				
0F57 6E	9F FFFF	JMP	[SFFFF] Done! Go do a warm start.			02080	02090				
	01070					02100	02110				
	01080					02120	02130				
	01090					02140	02150				
	01100	*	THE GUTS			02160	02170				
	01110					02180	02190				
	01120	*	"FIND" with "D" made negative			02200	02210				
	01130					02220	02230				
	01140					02240	02250				
0F5B	46	TITLE	FCB			02260	02270				
	49		/FIN/			02280	02290				
	4E					02300	02310				
0F5E	C4	FCB	\$80+'D			02320	02330				
						02340	02350				
						02360	02370				
						02380	02390				
						02400	02410				
						02420	02430				
						02440	02450				
						02460	02470				
						02480	02490				
						02500	02510				
						02520	02530				
						02540	02550				
						02560	02570				
						02580	02590				
						02600	02610				
						02620	02630				
						02640	02650				
						02660	02670				
						02680	02690				
						02700	02710				
						02720	02730				
						02740	02750				
						02760	02770				
						02780	02790				
						02800	02810				
						02820	02830				
						02840	02850				
						02860	02870				
						02880	02890				
						02900	02910				
						02920	02930				
						02940	02950				
						02960	02970				
						02980	02990				
						03000	03010				
						03020	03030				
						03040	03050				
						03060	03070				
						03080	03090				
						03100	03110				
						03120	03130				
						03140	03150				
						03160	03170				
						03180	03190				
						03200	03210				
						03220	03230				
						03240	03250				
						03260	03270				
						03280	03290				
						03300	03310				
						03320	03330				
						03340	03350				
						03360	03370				
						03380	03390				
						03400	03410				
						03420	03430				
						03440	03450				
						03460	03470				
						03480	03490				
						03500	03510				
						03520	03530				
						03540	03550				
						03560	03570				
						03580	03590				
						03600	03610				
						03620	03630				
						03640	03650				
						03660	03670				
						03680	03690				
						03700	03710				
						03720	03730				
						03740	03750				
						03760	03770				
						03780	03790				
						03800	03810				
						03820	03830				
						03840	03850				
						03860	03870				
						03880	03890				
						03900	03910				
						03920	03930				
						03940	03950				
						03960	03970				
						03980	03990				
						04000	04010				
						04020	04030				
						04040	04050				
						04060	04070				
						04080	04090				
						04100	04110				
						04120	04130				
						04140	04150				
						04160	04170				
						04180	04190				
						04200	04210				
						04220	04230				
						04240	04250				
						04260	04270				
						04280	04290				
						04300	04310				
						04320	04330				
						04340	04350				
						04360	04370				
						04380	04390				
						04400	04410				
						04420	04430				
						04440	04450				
						04460	04470				
						04480	04490				
						04500	04510				
						04520	04530				
						04540	04550				
						04560	04570				
						04580	04590				
						04600	04610				
						04620	04630				
						04640	04				

18 • UnderColor

# Nexus presents *New Keys to Creativity!*

## CHROMA-SKETCH The Picture Program Writer

CHROMA-SKETCH has an option that **writes a BASIC program** as you draw, paint and letter on the hi-res screen in **66 colors and shadings** (22 in each of 3 color-sets). Save program to disk or tape to recreate your picture from BASIC at any time, or save the screen as a binary image.

Dual cursors simplify arcs, circles, lines and boxes. Drawing aids include options for **full-screen crosshair cursor** and **"graph-paper" grid**. Automatic **preview** and **undo** commands available in 64K. **Help** key gives command and status display. If the program writer is enabled, you can return to **any previous stage** of your picture!

Draw complex shapes and CHROMA-SKETCH will redraw, rotate, reduce or enlarge them at any position in any color or pattern. Save the shape definitions to disk or tape for use in BASIC programs. **Paint in any dot pattern** including checks, stripes (horizontal or vertical) or others you define yourself. Draw dotted or twisted lines. Overlay color patterns for translucent effects.

CHROMA-SKETCH can be used with any combination of joystick devices including **Touch-Pad** or **Color Mouse**. If you prefer, you may use the fast, auto-repeat cursor keys to move diagonally, horizontally or vertically.

The fast, compact graphic programs you can write using CHROMA-SKETCH are **yours** to alter or use in any way you wish. These BASIC programs may be used for games, graphic adventures, educational software or on-screen slide shows.

Requires 32K Extended BASIC. Supports disk or cassette systems, all ROM versions, all graphic modes.

### CHROMA-SKETCH

\$29.95 ..... cassette  
\$34.95 ..... disk

FREE SHIPPING & HANDLING

## The **WIZARD** Font For Telewriter-64\*

*"I recommend Wizard for Telewriter devotees who want to do something nice for their hard-working word processor."*

Scott Norman  
Hot Coco, Feb. '85

*"...I can attest to the relief that innovation offers the eyes after long periods of key-boarding." "Wizard is another CoCo winner..."*

Charles Springer  
Rainbow, Dec. '84

The pleasantly proportioned characters of the WIZARD font have **true descenders** and **optional end-of-line markers**. If you do not prefer this clear, attractive font, take advantage of our money back guarantee.

The simple modification of Telewriter-64 done by WIZ causes no change in the operation of the word processor or the amount of buffer space. You may choose to permanently install the font in a backup copy of Telewriter-64 or to quickly install the font each time you load an unmodified copy of Telewriter-64.

The end-of-line markers are useful for locating run-on spaces at the end of lines and between lines, and for counting spaces between paragraphs. They are essential for the complex on-screen formatting that tables or poetry often involve, as well as for keeping track of carriage returns in program code.

WIZ will run in any CoCo, **16-64K, disk or cassette**. The WIZARD font does not alter the characters produced by your printer.

Details of how the new font is added to Telewriter-64 may be requested when you order WIZ. Previous purchasers may request this information if they include their WIZ ID# and a SASE.

### WIZ

\$16.95 ..... cassette  
\$21.95 ..... disk

FREE SHIPPING & HANDLING

**MONEY BACK GUARANTEE.** If not completely satisfied, you may return the material within 30 days for a prompt refund. Specify the program and media desired. Programs supplied on disk and cassette are identical in all respects. Send check or money order. Personal checks — no delay. Next day shipping in most cases.

**NEXUS**  
2601 Bridalwood Dr. No. 4  
Knoxville, TN 37917

for additional information: (615) 522-1977. CIS 71575,1706  
Write for a catalog. Dealer inquiries are welcome.  
TN residents add 7% sales tax.

\*Telewriter-64 is a trademark of Cognitech



\*\*\*\*\*  
\*\*\* NEWS FROM UNDER COLOR \*\*\* NEWS FOR UNDER THE COLORS \*\*\*  
\*\*\*\*\* Compiled December 24, 1984 \*\*\*\*\*  
\*\* Send news to: Under Color, Box 6809, Roxbury, VT 05669 \*\*  
\*\*\*\*\* CompuServe 70136,1257 \*\*\*\*\*  
\*\*\*\*\*

UNDER COLOR now confirms that the new Korean Color Computer uses a PIGGYBACK 64K UPGRADE ... according to a reliable source, Tandy saves over \$10 on the 16K machine, which is where Tandy believes most purchasers will STOP, since Tandy figures to spend \$5 more for every 64K upgrade on the new machines. Does Tandy believe that the Christmas KoKos will GET TOSSED IN THE CLOSET after a while? Watch for LOWER COST third-party upgrades soon ... it looks like SPECTRUM PROJECTS is leading the race to market a KoKo 64K upgrade.

\* \* \* \* \*

By the way, QUANTITY COST of bulk 64K memories is WAY, WAY DOWN. A check of mid-December prices shows BRAND NEW 64K memories from OKI costing only \$2.50 each in 500 quantities ... that's \$20 a set. WANNA MAKE A BUNDLE? Used, tested 64K chips can be obtained for as little as \$1.25 in 400 quantity. Get together 50 orders and PAY ONLY \$10 FOR A COMPLETE 64K UPGRADE. Remember 16K memories at \$60 apiece? The price slide is happening to 64K's ... now that the 256K MEMORIES are being shipped at under \$25 each.

\* \* \* \* \*

And SPEAKING OF 256K, that's the maximum memory size of the almost-for-certain Color Computer '09. The so-called '09, at first victim of fits and starts, may be in the Radio Shack stores BEFORE MID-YEAR 1985. It is almost sure to have a 6809E processor, 128K MEMORY STANDARD expandable to 256K, 600 by 400 HIGH-RESOLUTION COLOR GRAPHICS, a 3 1/4" rigid floppy drive, direct-memory access along with LEVEL 2 OS-9 (supporting MULTI-USER capabilities), and a professional look. The price tag? WITHOUT A MONITOR, the rumor has the '09 coming in at \$799. Is this a CHEVROLET COCO vs. a MERCEDES MACINTOSH?

\* \* \* \* \*

What's the best \$50 you can spend for software? A signup to CompuServe ... just to download MIKEYTERM, probably the finest Color Computer SMART TERMINAL PROGRAM you can't buy. Because IT'S FREE. Through the good will and generosity of programmer Mike "Guido" Ward, Mikeyterm has been released to the public domain. Initial users report that Mikeyterm IS AS GOOD AS ANY \$250 TERMINAL PROGRAM ON THE MARKET. If you already use CompuServe, GO PCS-126 (The Color SIG) and get your hands on Mikeyterm.

\* \* \* \* \*

Is there a 16/32-bit, 68000-BASED COMPUTER in your future? Dennis Kitsz is fielding any and all IDEAS FROM COCO USERS in search of the ultimately malleable personal computer. Dennis says NO BELLS AND WHISTLES, just a basic, wide-open design with lots of capability for expansion, plus 1/2 MEGABYTE OF MEMORY. Write: Dennis Kitsz, PROJECT 68000, Roxbury, Vermont 05669.

\* \* \* \* \*

PCjr WINS HANDS DOWN, according to word from a well-known CoCo author. Last week he GAVE UP A COCO-PCjr COMPARISON STUDY because midway through, he began to feel that the COCO COULDN'T MEASURE UP, dollar for dollar, against the PCjr's new 1985 price breaks. Why did Dr. X can the project? "I didn't want to depress the CoCo faithful," he reported. The PCjr overtakes the CoCo as soon as you start to add peripherals, said Dr. X. UNDER COLOR is trying to convince him to RELEASE HIS FINDINGS anyway; readers wishing to have the report published please contact UNDER COLOR.

\* \* \* \* \*

Please make the following additions and changes to your reference list from issue #1:

26-3005	Reserved (32K non-Extended Color Computer?)
26-3021	4-pin DIN to 5-pin DIN cable
26-3127	64K Extended Basic Color Computer 2, RF out
26-3128	64K Extended Basic Color Computer 2, NTSC out
26-3134A	16K "Korean" Basic (two 16Kx4 RAMs)
26-3136A	16K "Korean" Extended (two 16Kx4 RAMs)

\* \* \* \* \*

COLOR MICRO JOURNAL, are you there? Two authors out looking for work called UNDER COLOR to say that CMJ was on the rocks. But as of this date NO CONFIRMATION of the demise of the newspaper-style CoCo publication was available. If CMJ goes, it will be the THIRD COCO MAG TO BITE THE DUST in recent times, along with Color Computer News and The Color Computer Magazine. Rumors of the death of Hot CoCo were FIRMLY SQUASHED once again by publisher Jeff DeTray. All the while, Lonnie Falk at The Rainbow relaxes in his easy chair, watching the unbecoming scuffle outside his office full of Southern hospitality. An update on CMJ will be provided in the next issue.

\* \* \* \* \*

HAPPY NEW YEAR \$7C1 from all of us at UNDER COLOR.

\* \* \* \* \*

**PRODUCT**  
**64K Disk Utilities**  
**Spectrum Projects**  
**P.O. 21272**  
**Woodhaven, NY 11412**  
**64K**  
**\$21.95 disk**

**By Mark Haverstock**

Spectrum Project's 64K Disk Utilities consists of three separate utility programs for the 64K Disk Color Computer: a 40K memory program, software print spooler, and ROMpak to disk converter. It's a fine example of a program that will let you see some of the capabilities of a 64K machine.

"40K," the first of the programs, lets you obtain 8K more RAM for Basic or assembly programming. This is accomplished by relocating the Extended Basic ROM from \$8000 to \$D800. Once 40K is executed, PRINT MEM displays 31015. Only 31015? Remember that 2K of disk space and four pages of memory for graphics are still reserved. Interestingly enough, the PCLEAR1 command will release those graphic pages, providing even more memory, but will register as -29913. (Note that numbers above 32767 are displayed as negative numbers.) Beside freeing more memory, it lets you modify Basic ROMs, which now reside in RAM. Two notes of caution apply to this program: Reset will wipe out any program in memory. Also, "40K" and "SPOOL64" may not be used at the same time. Any Color Computer user can now access some of that extra memory in a 64K machine without purchasing exotic DOS systems like OS-9.

"ROMpak to Disk Converter" is potentially the most appealing program in the package. Disk users can use most of their old ROMpaks without having to plug and unplug the disk controller by relocating the ROMpak programs to disk.

First the ROM is saved to cassette. This procedure involves covering pin 7 of the ROMpak to prevent it from auto-starting. The cartridge is then inserted into the machine and CSAVEM is executed. Afterwards, ROMcrack is run and the tape is read and relocated to disk. Once on disk, programs may be executed as any other assembly language program. Before trying this procedure, run ROMcrack. An excellent graphics display shows where pin 7 is located to prevent confusion.

Note that all ROMpaks will not relocate to disk using ROMcrack. Some, such as "Megabug" and "Stellar Lifeline," have routines which do not relocate well in different memory locations. Others, such as "Galactic Attack" and "Math Bingo," transfer to disk without problems.

"Software Disk Spooler" lets the upper 32K of memory act as a RAM buffer to feed your printer. If you've ever waited for a printer to finish several pages of text, you'll appreciate what the spooler can do. With SPOOL64 the computer is free for other tasks while the printer buzzes merrily on its way.

Upon running the program, a main menu allows selection of six different bauds, from a slow 300 to a speedy 9600 baud.

Documentation for the three programs was minimal, consisting of two typewritten pages. "ROMcrack" and "Spooler" need clearer and more specific directions, as some are confusing. An example from ROMcrack: "Next, turn off your computer and remove a cartridge while the computer is on!"

Aside from the documentation, "64K Disk Utilities" is well-written and performs as advertised. It would be a useful addition for most Color Computer software libraries. (end)

**Review: Super Deluxe Keyboard**  
**By Jeffrey S. Parker**

**Super Deluxe Keyboard**  
**Radio Shack Cat. No. 26-3016**  
**Installation: \$25.00**  
**Keyboard: \$39.95**

**Available: Radio Shack nationwide,**  
**or**  
**Computer Plus**  
**450 King St.**  
**Littleton, MA 01460**  
**617-486-3193**  
**Price: \$44.95**

*Caution! The catalog numbers for the low-profile keyboard and the new super deluxe keyboard are identical! Be sure to specify new full size keyboard when ordering!*

The last bastion in keyboards has finally been breached by Radio Shack! After all those years, and all those keyboards, we have finally achieved a full-sized keyboard. The Super Deluxe keyboard is standard equipment on the new 64K Color Computer II. It is a full size, full travel keyboard, with the letters printed on the upper left corner of the keys, similar to the IBM format. The colors match the case, with the cursor, shift, clear and return keys in pure white. The Break key is still red.

I thought the ultimate had been reached when the low profile board came out, but one brief session at the Super Deluxe keyboard reveals the difference. The keys are high quality, with a good spring tension, and sensitive enough to register a light touch. The key tension is especially ideal for high speed touch-typing.

The Super Deluxe keyboard is sold only as stock equipment on the 64K Color Computer II at present, but will be available as an upgrade through Radio Shack dealers. Unfortunately, Radio Shack must do the installation, and they charge accordingly.

There are several third party vendors from whom the board can be purchased, if one is willing and able to perform the installation. Computer Plus, in Littleton, MA, is one place that has them in stock. They are retailing the keyboard for \$44.95, plus tax, and of course, shipping and handling.

If you have an F board or later version, the installation is extremely easy (remember to save your current keyboard if there's nothing wrong with it). If you have owned your computer for less than 90 days, opening it will void the warranty, so either wait for Radio Shack, or wait for 90 days. According to the New England Region supplier, Radio Shack centers will be carrying the new keyboards in a matter of a few weeks. Among other things, the Super Deluxe keyboard could make an excellent Christmas present! (end)

## PRODUCT Flexnet BBS Oklahoma City, OK (405)722-6809

By Bob Rosen

The Flexnet BBS is an unusual bulletin board system; it more resembles an operating system than a traditional BBS system. It is an adaptation of the Flex operating system from Technical Systems Consultants. The experienced user of Flex can go right to work on this BBS as though he had been on it for awhile; those unfamiliar with Flex may need a little time to get used to the system, but think of the opportunity to learn how this great operating system works!

I was introduced to Flex through my purchase of a TRS-80 Color Computer and was a little taken aback with the price of Flex programs. Most Color owners selected their computer for one reason: they didn't have a lot of money to spend. Well, you get what you pay for—especially with the limited operating system in the Color Computer.

The Flexnet BBS is a great service to Color owners in two ways. First, it allows the potential purchaser of one of the fine Flex implementations to try a Flex-like system before buying a copy. Second, there are lots of Flex utilities available on Flexnet, written by other Flexnet users. This is a great way to enhance your Flex library and learn a heck of a lot at minimum expense. The programs are in both source and object form. There are communications programs you can download in source form and assemble that will let you download machine code files. You would have to purchase a copy of Flex and an assembler if you wanted to use some of the Flex utilities, but there are also a lot of free download programs on the system that will run under RS Disk Basic. Another nice feature is that there are many knowledgeable people on the board who know a lot about Flex and the 6809 in general. If you pose a technical question on the BBS, there is a good chance it will be answered.

When you check into the board, there is a short greeting message and then the prompt FLEXNET. I thought a lot of being able to check into a BBS without having to give my name; this is the first I've ever seen. When you get the prompt, it's just like + + + in Flex; you give it a Flex command, and it's off and running. An example would be CAT; this would give you a catalog of the disk files. DIR gave me a more expanded directory of what was on the disk, and DIR 1 gave me a further directory of what was probably on another disk drive.

An interesting directory-type program was called FILES CMD; it was very handy because you can get a directory of files that have specific characteristics. For instance, if you only want a directory of files starting with "A," type FILES A; or if you want files with just the text, just type FILES TXT. To list a file that might be of interest, one would type LIST FILENAME EXT. The command LISTNEW [MM DD YY] will list all the files dated on or after the date you specify. This will let you look at all the files you want to without typing in each file name.

If you check into Flexnet and forget what to do, you can just type HELP and the system will walk you through it. The same goes for any command you may have a question about. For example, if you want more information about the command file SEND CMD, just type HELP SEND and the system will give you instructions on using the system's file transfer capability.

You can leave a program, message, or any other text-type file on the board using the Flex command BUILD FILENAME. Again, if you are not familiar with Flex, just type HELP BUILD.

If you want to know more, check into this very interesting BBS system. There are some pretty dull and poorly run BBS's in the country, but this is not one of them. My hat's off to Roger Walton and Bill Holland. (end)

*continued from page 6*

620 The derby takes full shape through the Paint command.  
630-650 A series of characteristic spicurls is formed across the forehead.

660-720 A series of sounds is assembled into F\$, which when played at 720 proves to be the *Cuckoo Song*.

The program *Another Fine Mess* is achieved through highest resolution, PMODE 4,1, and it is monochromatic. By contrast the program *Winky* uses a few other tricks to achieve fairly high resolution along with a few colors and a bit of animation.

In *Winky* you can isolate effects by stopping the program after specific lines. For example, put in this line: 155 GOTO 155. This freezes the display to show you the effect of Line 150. Delete Line 155 and put in a new line: 165 GOTO 165. This will show the effect of Line 160. In this way you can move slowly through the program studying the effects of any given line.

I tend to use the Circle command to create the faces of characters—and somewhat symmetrical faces at that. Remember, I said I'm no artist, though I'm pleased with the results so far. (end)

*I'm planning to build the 64K upgrade that appeared in the October, 1983 issue of The Color Computer Magazine, for my revision D board computer. In the article it states that the ROM must be changed because it isn't a 1.1. However, trying EXEC 41175 indicates I have a 1.1 ROM. Do I still have to change ROMs, and what does this number indicate?*

Mark Patrick  
W. Carrollton, OH

No, you don't need to change ROMs. The 1.1 ROMs correct several minor bugs present in the original 1.0 ROM and allow the computer to address more than just 16K of RAM.

*I have the old grey Color Computer with 64K upgrade, HJL keyboard, and Green Mountain Micro Lowerkit II. I'm having space trouble with the internal modem. With the Lowerkit installed there isn't enough room for the two micro-mini switches to clear the RF shield. A schematic of the Modem I would be most helpful, but if that's not available could you label all terminals of S-1 (modem) and the installed micro-mini switches?*

C.S. Holloway  
Georgetown, CA

Your letter is very confusing! I can't find anything about an internally installed modem for the Color Computer. And the Modem I from Radio Shack (26-1175) is an external modem that you connect to the Color Computer via the serial port. (Please, when requesting help, include all the information you have on the hardware you're writing about. If I don't know what the hardware is, I can't help.)

In any case, I suggest you contact Green Mountain Micro and see if they have any suggestions to make the device fit around their Lowerkit II.

*I purchased Radio Shack's replacement keyboard for my D revision Color Computer. I received a keyboard and a handful of parts, no instructions. My friendly dealer said Radio Shack would be glad to install the keyboard, but because I have heavily modified my unit, I would prefer not to do that.*

*Can you supply me with instructions? I have electronics experience and equipment.*

Gerald Stewart  
Rockbridge, OH

You should call National Parts and request the installation instructions for the replacement keyboard. In fact, the technical manual/installation instructions for any Radio Shack computer product can be ordered from National Parts. To get the correct part number for the manual you need, just add the letters MS in front of the hardware's part number. Thus, the part number for the new keyboard is MS260-3016. If you're still in doubt, call and ask the National Parts operator if you have the right number for what you want.

Radio Shack's National Parts address is: 900 East Northside Drive, Fort Worth, Texas, 76102, 817-870-5662.

## Manufacturer's Announcements and New Products

### Special Announcement Free Program

Memscan (Basic) is handy especially for programmers involved with graphics. Memscan is a memory pager utility that lets the user examine RAM in all display modes, locate and examine other programs stored in memory, examine memory allocation, and compare graphic pictures in various PMODES. 64K users can examine ROMs in the all RAM mode. Features jump to page or address, info on current display, manual and auto movement through memory, select display mode, return to previous location/display mode, and more. Cost: Free (not freeware)—send either \$1 S&H or SASE with cassette and 40 cents postage, to NEXUS, 2601 Bridalwood Dr. #4, Knoxville, TN 37917 (CIS 71575,1706).

### New Product Announcement Wiz

Wiz installs in Telewriter-64 a new on-screen character set (the Wizard font) designed for clarity and attractiveness. The font provides true descenders and optional end-of-line markers, and is vaguely reminiscent of calligraphy in style. It maximizes the readability of all display modes. The Wizard font may be installed each time you load Telewriter-64, or it may be permanently installed in a back-up copy of the word processor. Full instructions are included. The modification alters neither the size or operation of Telewriter-64. Wiz works in any Color Computer, 16K-64K, cassette and disk, and is supplied on cassette for \$16.95 (S&H included). Contact Nexus, 2601 Bridalwood Dr. #4, Knoxville, TN 37917 (CIS 71575,1706).

### New Product Announcement Screen Dump

SCRINT is an assembly language screen dump for PMODE4 with a Basic driver that adds print lines to the left and right of the dumped image. This lets the image be labeled and marked externally, positioned horizontally, or simply allows text to be printed on the same page level as the image. The program also allows the dump to be halted at any of 27 levels on the screen. It is excellent for graphics. The program allows selection of a printed image 1, 2 or 3 times standard width. The user may select a white on black or black on white dump. It works with Radio Shack dot matrix printers and other comparable 7-bit graphics dot matrix printers. SCRINT works on any Color Computer, 16K-64K, cassette and disk. It is supplied on cassette for \$7.00 (S&H included). Contact Nexus, 2601 Bridalwood Dr. #4, Knoxville, TN 37917 (CIS 71575,1706).



**Price Changes  
Occur On A  
Daily Basis.  
Please Call  
1-800-343-8841**

# PRICE BREAKTHROUGH

**Price Changes  
Occur On A  
Daily Basis.  
Please Call  
1-800-343-8841**

## MEGADISK™ HARD DISK DRIVE SYSTEMS

**TOLL FREE ORDERING 1-800-343-8841**

For the **IBM/PC, Tandy 1000, TRS/80 Models I/III/IV/4P, Compaq, Eagle, Sanyo, Tava, PC Workalikes, Color Computers, Apple/Franklin, Heath/Zenith, Max/80**  
Complete with Hardware, Cables, Software and Quikfit Installation

5 Megabytes Internal Mount	starting at \$ 449.95
10 Megabytes Internal Mount	starting at 599.95
20 Megabytes Internal Mount	starting at 1,199.95
5 Megabytes External System	starting at 649.95
10 Megabytes External System	starting at 849.95
20 Megabytes External System	starting at 1,299.95
3.3 Megabytes Kodak Backup System	starting at 599.95
Streaming Tape Backup System	starting at 899.95

**DOS Systems Available:** IBM/Heath — DOS, 1.0, 2.0, 2.1, 3.0, or later — Apple Franklin — DOS 3.3, Prodos  
TRS/80-LDOS, TRSDOS 6.x, Newdos/80, Dosplus, CP/M, COCO DOS, Max/80 LDOS, OS9

**WARRANTIED FOR ONE FULL YEAR — PARTS AND LABOR — 24 HOUR SERVICE — CALL TOLL FREE — 1-800-343-8841**

### FLOPPY DISK DRIVES

Our Disk Drives are UL approved — Our Floppy Drive Cabinets and Power Supplies are Underwriters Laboratory Listed and have passed the required Federal Communications Part 15 Section B-EMI/RFI tests.

**Warranty on all disk drives is one full years parts and labor. Warranty on floppy disk drive power supplies is five (5) years. In warranty or out of warranty service is 24 hour turn-a-round on all disk drives.**

<b>Tandon — Full Height Drives</b>	
100-1 Single Sided 40 tk Bare	\$128.00
In Case with Power Supply	169.95
Dual Drives in One Cabinet	329.95
100-2 Dual Sided 40 tk Bare	165.00
In Case with Power Supply	209.95
Dual Drives in One Cabinet	384.95
<b>Half High Drives</b>	
65-1 Single Sided 40 tk Bare	125.00
In Case with Power Supply	159.95
Dual Drives in One Cabinet	309.95
65-2 Dual Sided 40 tk Bare	145.00
In Case with Power Supply	179.95
Dual Drives in One Cabinet	349.95
65-4 Dual Sided 80 tk Bare	165.00
In Case with Power Supply	199.95
Dual Drives in One Cabinet	359.95
<b>TEAC Half High Drives</b>	
55A Single Sided 40 tk Bare	140.00
In Case with Power Supply	169.95
Dual Drives in One Cabinet	319.95
55B Dual Sided 40 tk Bare	160.00
In Case with Power Supply	199.95
Dual Drives in One Cabinet	359.95
55F Dual Sided 80 tk Bare	180.00
In Case with Power Supply	219.95
Dual Drives in One Cabinet	389.95
<b>Apple/Franklin Disk Drives</b>	
35/40 Track in Case with Cable and Software	159.95
Controller Card for Two Disk Drives	49.95
Combination Price for Disk Drive and Controller	199.95
<b>Commodore Disk Drives</b>	
	239.95

### COMPUTERS

**All of our computers come with a full one year Warranty — Parts and Labor — 24 Hour Service on all in stock parts.**

IBM/PC-256K Two Floppy Drives, One Year Warranty	\$1,895.00
With Monitor Card and High Resolution Monitor	2,195.00
IBM/PC-256K 5 Megabyte Drive, One Floppy Drive	2,495.00
With Monitor Card and Monochrome Monitor	2,695.00
10 Megabyte System	2,695.00
With Monitor Card and Monochrome Monitor	2,995.00
IBM Lookalike Monitor 800h x 650v resolution w/cable	199.00
TRS/80 Model IV Computer 128K Dual Drive RS232	1,095.00

### PRINTERS

<b>Dot Matrix</b>	
<b>Star Micronics</b>	
Gemini X-Series Parallel 120 CPS	starting at \$259.95
Delta 10/15 160 CPS	starting at 424.95
Radix 10/15 200 CPS	starting at 649.95
Panasonic 1090	249.95
<b>Daisy Wheel</b>	
Silver Reed 440 80 Column 12 CPS	315.95
550 132 Column 19 CPS	439.95
770 132 Column 36 CPS	895.00
Olympia 132 Column 14 CPS with Form and Tractor	399.95
Star Micronics 100 Column 18 CPS	352.95
Apple/Franklin Printer Interface w/Graphics and Cable	84.95
Printer Cables	starting at 19.95
Printer Paper — Microperf Edge 1000 Sheets	16.95

### ELECTRICAL

Surge Protectors — Line Filters — SL Waber — 6 Outlets with Switch	\$ 39.95
Uninterruptable Power Supplies — Panamax 250 Watt-15 Minute	399.95

### MODEMS

Volsmodem 300 Baud	\$ 59.95
Signalman Mark X Audodial	123.95
Mark XII 1200/300 Baud Audodial	284.95

### ADD IN BOARDS FOR THE IBM

STB — Rio Plus 128K	\$299.95
Super Rio 128K	219.95
Graphix Plus	283.00
Graphics Plus II	355.00
Parallel Printer Port	74.95
Serial Port	84.95
Monochrome Board with Parallel Printer Port	210.00
Quadram — Quadboard 512 128K	269.95
Quadcolor I	215.95
Quadcolor II	439.95

### MISCELLANEOUS

Diskettes in 10 Pack	from \$ 12.95
Twoprint Switches	from 99.95
Disk Drive Cables	from 16.00
Maintenance Cleaning Kits	12.00
Parallel Printer Buffers 16K	149.95
<b>Floppy Disk Drive Cables</b>	
1 Drive	16.00
2 Drives	18.95
Heath/Zenith 2 Drive Cables — Shielded	39.95

### COLOR COMPUTER DISK DRIVE SYSTEMS AND ADD IN PRODUCTS

40 Track Single Head Drive with Case, Power Supply, Cable	
Controller, Instruction Booklet, Diskettes	\$279.95
Above with Dual Drives in One Cabinet	413.95
40 Track Dual Head with Case, Power Supply, Cable,	
Controller, Instruction Booklet, Diskettes	289.95
Above with Dual Drives in One Cabinet	429.95
128 Memory Upgrade Kit	129.95
Dual DOS Switch	19.95
With Second DOS System — JDOS, RSDOS, Micro DOS	48.00

### TRS/80 HARDWARE

<b>Model I Starter System — Delivered by UPS</b>	
One Single Sided Disk Drive, Case, Cable, Power Supply,	
TRSDOS 1.3 and Manual	\$220.00
Model III/IV Easy to Install Disk Drive Systems	309.95
Memory Upgrades — 4116 and 4164	starting at 1.50 ea.

**ALL IN-STOCK ITEMS SHIPPED WITHIN 24 HOURS. SAME DAY SHIPPING  
PROVIDED BY REQUEST WITHOUT ANY EXTRA HANDLING CHARGES.**

# SOFTWARE SUPPORT, INC.

1 Edgell Road, Framingham, MA 01701 (617) 872-9090 Telex-383425

Hours: Mon. thru Fri. 9:30 am to 5:30 pm (E.S.T.) Sat. 10 am to 3:30 pm

**SERVICE POLICY — Our Professional Technical Staff Is Available To Assist You Monday Through Saturday.  
WARRANTIES — Disk Drives — One Full Year Parts And Labor. Floppy Disk Drive Power Supplies — Five (5) Years.  
SERVICE — 24 Hour Turn-A-Round On All In-Stock Parts. Price Changes Occur On A Daily Basis. Please Call**

## Toll Free 1-800-343-8841

**For Our Latest Price Saving Specials.**

# DYNACALC®

## CoCo's Best & Fastest Spreadsheet System

### ACCLAIMED BY THE EXPERTS

*"DYNACALC is my choice for a CoCo spreadsheet."*

*Dan Downard, RAINBOW, September, 1984.*


*"Eat your heart out, Lotus 1-2-3!"*

*Scott Norman, HOT CoCo, October, 1984.*

#### Built-in Features:

- 51 x 24 Display with Lower Case
- Super-fast Smart Screen Refresh
- Auto-Repeat Keyboard Driver
- Keysaver (TM) repeats last command x times
- Disk Operating System (works just like ROM DOS)
- Easy communication with BASIC/DOS programs
- Two-way communications with PRO-COLOR-FILE ★ Enhanced ★
- Outputs to ASCII Word Processors like Telewriter-64
- Fast 16-Digit Arithmetic with Scientific Functions
- Summation, Mean, and Standard Deviation Functions
- Logical Functions with String & Numeric Comparison
- String locate command to navigate large worksheets
- Sort full or partial worksheet by columns or rows
- Line, Bar, Hi/Lo/Close, Circle Graphs
- Full Graphics captioning and overlay facility
- Graphics Drivers for all popular Printers
- Joystick/Mouse Driver for Cursor Movement
- Works with any ROM versions, even JDOS
- 33k Available Worksheet Space
- Up to 256 Columns or 256 Rows
- Can use VisiCalc worksheets & training materials
- On-screen Help Messages

**NOW  
ONLY  
\$99<sup>95</sup>**

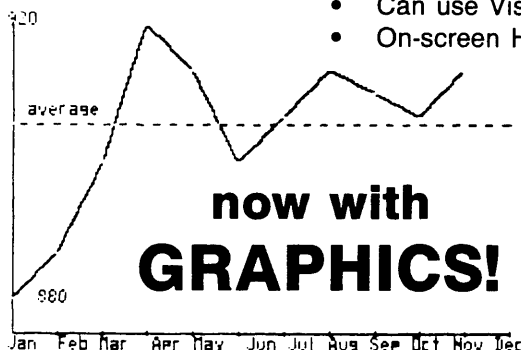

#### FOR 64K DISK SYSTEMS

*available from*

#### COMPUTER SYSTEMS CENTER

42 Four Seasons Center #122

Chesterfield, MO 63017

(314) 576-5020

10 to 6 Mon.-Fri.



**NEW  
ADDRESS**

or your local DYNACALC dealer

Price US\$99.95

Outside North America add \$10 postage

DYNACALC Reg. U. S. Pat. Off.

Lotus and 1-2-3 are trademarks of Lotus Development Corp.

PRO-COLOR-FILE is a trademark of Derringer Software

Telewriter-64 is a trademark of Cognitec

VisiCalc is a trademark of VisiCorp.

CANADA- CDN\$129.95

RGS MICRO INC.

759, VICTORIA SQUARE 405

MONTREAL H2Y 2J3

TEL.: (514) 287-1563

ORDER LINE ONLY ★ ★ ★

QUEBEC-ONTARIO-MARITIMES

800-361-5338

WESTERN CANADA 800-361-5155

