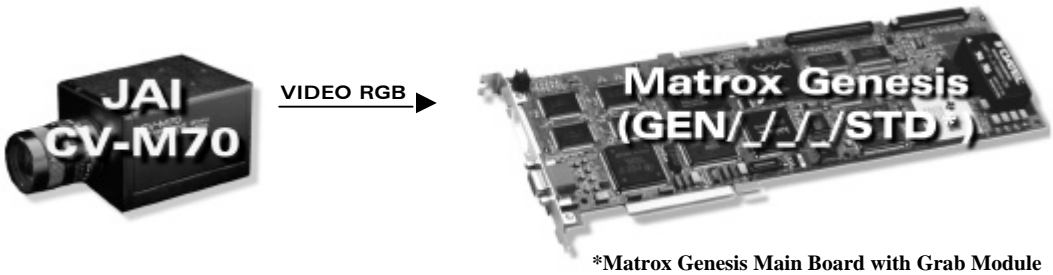
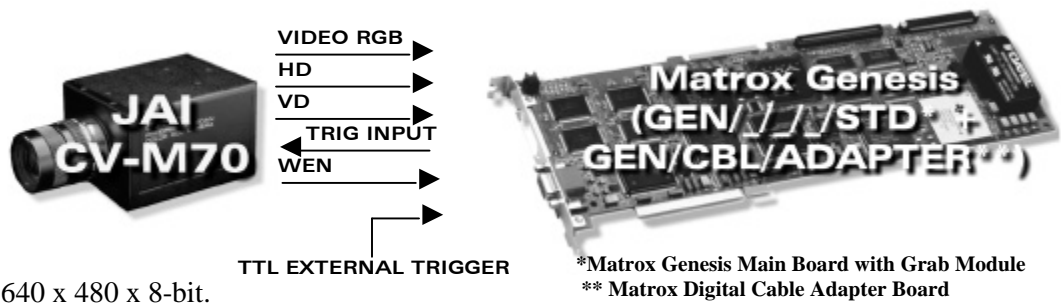


Application Note:

Interfacing non-standard cameras to Matrox Genesis

JAI CV-M70

November 9, 1998

Camera Descriptions	<ul style="list-style-type: none"> • 640 x 480 x 8-bit @ 30 fps. • Single channel analog video output. • Progressive scan. • External sync. • Internal exposure control. • Pixel clock: 12.637 MHz
Interface modes	<ul style="list-style-type: none"> • Continuous, asynchronous reset
Camera Interface Briefs	<p>Mode 1: Continuous</p> <div data-bbox="406 661 1453 934">  <p>*Matrox Genesis Main Board with Grab Module</p> </div> <ul style="list-style-type: none"> • 640 x 480 x 8-bit @ 30 fps. • Analog RGB video output. • Progressive scan. • Matrox Genesis receiving RGB video signals from camera. • DCF used: CVM70AC.DCF <p>Mode 2: Asynchronous Reset</p> <div data-bbox="422 1176 1477 1480">  <p>*Matrox Genesis Main Board with Grab Module ** Matrox Digital Cable Adapter Board</p> </div> <ul style="list-style-type: none"> • 640 x 480 x 8-bit. • Analog RGB video output. • Progressive scan. • Matrox Genesis receiving TTL external trigger. • Matrox Genesis sending EXPOSURE1 (TRIGGER INPUT) signal to camera. • Matrox Genesis receiving HSYNC (HD), VSYNC (VD), TRIGGER (WEN) and RGB video signals from camera. • DCF used: CVM70AT.DCF

Application Note:

Interfacing non-standard cameras to Matrox Genesis

JAI CV-M70

November 9, 1998

Camera Interface Details	<div>Switch settings (SW1 on rear panel of camera) :</div> <div><div>Mode 1 : Continuous mode</div><div><table><tr><th>OFF</th><th>ON</th></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td></td><td>•</td></tr><tr><td></td><td>•</td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr></table><div><div><div>1 shutter data 2SB</div><div>2 shutter data 1SB</div><div>3 shutter data LSB</div><div>4 electronic shutter</div><div>5 scanning system</div><div>6 gamma correction</div><div>7 master gain</div><div>8 local/remote</div></div><div>Switches 4 and 5 set to ON, all others are set to OFF</div></div></div><div><div>Mode 2 : Asynchronous reset mode</div><div><table><tr><th>OFF</th><th>ON</th></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td></td><td>•</td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr><tr><td>•</td><td></td></tr></table><div><div><div>1 shutter data 2SB</div><div>2 shutter data 1SB</div><div>3 shutter data LSB</div><div>4 electronic shutter</div><div>5 Scanning system</div><div>6 gamma correction</div><div>7 master gain</div><div>8 local/remote</div></div><div>Switch 5 set to ON, all others are set to OFF</div></div></div></div></div>	OFF	ON	•		•		•			•		•	•		•		•		OFF	ON	•		•		•		•			•	•		•		•	
OFF	ON																																				
•																																					
•																																					
•																																					
	•																																				
	•																																				
•																																					
•																																					
•																																					
OFF	ON																																				
•																																					
•																																					
•																																					
•																																					
	•																																				
•																																					
•																																					
•																																					
Cabling Requirements	<div><div>Mode 1: Continuous</div><div><ul style="list-style-type: none">• IMG-7W2-TO-5BNC cable required for video output of camera.• Red BNC connected to pin #3 (9-pin D-SUB connector-Red Video Source), Green BNC connected to pin #4 (9-pin D-SUB connector-Green Video Source), Blue BNC connected to pin #5 (9-pin D-SUB connector-Blue Video Source) and Black BNC connected to pin #7 (9-pin D-SUB connector-Black Int. Sync Out).</div></div> <div><div>Mode 2: Asynchronous Reset</div><div><ul style="list-style-type: none">• IMG-7W2-TO-5BNC and DBHD68-TO-OPEN cables required for video output of camera, and sync and control output.• Red, Green, Blue and Black BNC connections as in Mode 1: Continuous.• Connections between the 6-pin multi connector (RS-232C) of the camera and the 68-pin connector of the Matrox Genesis are as follows:</div></div> <div><div><div>JAI CV-M70</div><div>(6-pin multi connector)</div></div><div><div>GEN/_/_/_STD (DBHD68-TO-OPEN)</div><div>(68-pin digital interface connector)</div></div><div><table><tr><td>Pin name</td><td>Pin no.</td><td></td><td>Pin name</td><td>Pin no.</td></tr><tr><td>TRIGGER INPUT</td><td>05</td><td>←</td><td>EXPOSURE1, OUTPUT, TTL</td><td>24</td></tr><tr><td>WEN OUTPUT</td><td>06</td><td>→</td><td>TRIGGER, INPUT, TTL</td><td>67</td></tr></table></div></div>	Pin name	Pin no.		Pin name	Pin no.	TRIGGER INPUT	05	←	EXPOSURE1, OUTPUT, TTL	24	WEN OUTPUT	06	→	TRIGGER, INPUT, TTL	67																					
Pin name	Pin no.		Pin name	Pin no.																																	
TRIGGER INPUT	05	←	EXPOSURE1, OUTPUT, TTL	24																																	
WEN OUTPUT	06	→	TRIGGER, INPUT, TTL	67																																	

Application Note:

Interfacing non-standard cameras to Matrox Genesis

JAI CV-M70

November 9, 1998

Cabling Requirements (continued)	<ul style="list-style-type: none"> Connections between the 12-pin multi connector (DC/Ext. Sync) of the camera and the 68-pin connector of the Matrox Genesis are as follows: 			
	JAI CV-M70 (12-pin multi connector)		GEN/_/_/_/STD (DBHD68-TO-OPEN) (44-pin digital interface connector)	
	<i>Pin name</i>	<i>Pin no.</i>	<i>Pin name</i>	<i>Pin no.</i>
	HD	06	→ HSYNC, INPUT, TTL	34
	VD	07	← EXPOSURE2, OUTPUT, TTL	58

The DCF(s) mentioned in this application note can be found on the MIL and Native Library CD, or our FTP site ([ftp.matrox.com](ftp:matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate Headquarters:
Canada and U.S.A.
Matrox Electronic Systems Ltd.
1055 St.Regis Blvd.
Dorval, Quebec, Canada
H9P 2T4
Tel: (514) 685-7230
Fax: (514) 822-6273

Sales Offices:
U.K.
Matrox (UK) Ltd.
Sefton Park, Stoke Poges
Buckinghamshire
U.K. SL2 4JS
Tel: +44 (0) 1753 665500
Fax: +44 (0) 1753 665599

France
Matrox France SARL
2, rue de la Couture,
Silic 225
94528 Rungis Cedex
Tel: (0) 1 45-60-62-00
Fax: (0) 1 45-60-62-05

Germany
Matrox GmbH
Inselkammerstr.8
D-82008
Unterhaching
Germany
Tel: 089/614 4740
Fax: 089/614 9743

Asia Pacific
Matrox Asia Liaison Office
Rm. 1901, 19/F, Workington Tower,
78 Bonham Strand E.,
Sheung Wan, Hong Kong.
Tel: 852.2877.5387
Fax: 852.2537.9530

